
INDUSTRIAL COMPONENT DATA

# DFC T 2,4 QVGA S 5015 2203539 PHOENIX CONTACT TFT module 2.4", 320 x 240 pixels, transmissive, LED backlight..

**Brand: PHOENIX CONTACT | Manufacturer Part Number: DFC T 2,4 QVGA S 5015**

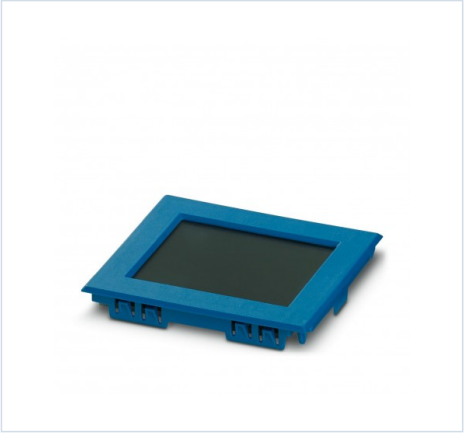

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | DFC T 2,4 QVGA S 5015 |
| Catalog number | 2203539 |
| Category | Display/operator panel |
| Minimum order | 5 Pcs |
| Document ID | EO-23EE9B0B10 |
| Generated | 2026-11-19 |

## Product Overview

TFT module 2.4", 320 x 240 pixels, transmissive, LED backlight, interface: SPI, operating temperature: -20°C ... 70°C; frame color (RAL): blue (5015)
2.4" TFT module, 320 x 240 pixels, transmissive, light-emitting diode backlight, Interface: SPI, operating temperature: -20 °C ... 70°C; Frame Color (RAL): Blue (5015)

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > Housing (HS) |

## Additional Product Information

Technical dataProduct propertiesProduct type Display
Data management status
Article revision 00
Display
Display type Color display TFT
Display type LCD with backlighting
Panel technology TFT
Diagonals (cm) 6.9 cm
Diagonals (inch) 2.4 in.
Screen resolution 320 x 240 Pixel(s) (QVGA)
Display formats 4:3
Display lighting type LED, white

Contrast ratio 500
Viewing direction 6:00
Controller HX8347I
InterfacesInterface SPI
DimensionsDimensions 72 mm x 59 mm x 9 mm (Dimensions of the display frame)
49 mm x 37 mm (Active range)
Material specificationsColor (Housing) blue (RAL 5015)
Surface characteristics untreated
Environmental and real-life conditionsVibration test
Specification IEC 60068-2-6:2007-12
Frequency 10 - 55 - 10 Hz
Sweep speed 1 octave/min
Test duration per axis 15 min.
Test directions X-, Y- and Z-axis
Ambient conditions
Ambient temperature (operation) -20 °C ... 70 °C
Ambient temperature (storage/transport) -30 °C ... 80 °C

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / DFC T 2,4 QVGA S 5015 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.