
INDUSTRIAL COMPONENT DATA

FKCOR 2,5/ 9-ST-5,08 1861302 PHOENIX CONTACT Printed-circuit board connector

Brand: PHOENIX CONTACT | Manufacturer Part Number: FKCOR 2,5/ 9-ST-5,08

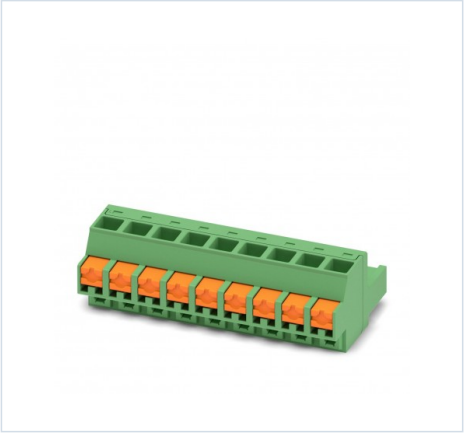

Manufacturer	PHOENIX CONTACT
MPN / Reference	FKCOR 2,5/ 9-ST-5,08
Catalog number	1861302
Category	Cable connector
Minimum order	100 Pcs
Document ID	EO-FE66472E85
Generated	2026-11-19

Product Overview

Printed-circuit board connector
Connector for printed circuit board, nominal section: 2.5 mm², color: green, nominal current: 12 A, nominal voltage (III/2): 320 V, contact surface: Tin, contact type: Female, number of potentials: 9, number of rows: 1, number of poles: 9, number of connections: 9, family of articles: FKCOR 2.5/.. -ST, pitch: 5.08 mm, connection type: Push-in spring connection, conductor connection direction/printed circuit board: 90 °, clamping hook: - Clamping hook, plug-in system: COMBICON MSTB 2.5, locking: without, fixing type: without, packaging type: boxed
PCB connector, nominal cross-section: 2.5 mm2, color: green, rated current: 12 A, rated voltage (III/2): 320 V, contact surface: Sn, contact type: socket, number of potentials: 9, number of rows: 1, number of poles: 9, number of terminals: 9, article family: FKCOR 2,5/.. -ST, Pitch: 5.08 mm, Connection type: Push-in spring connection, Connection direction conductor/board: 90 °, Locking hook: - Locking hook, Plug-in system: COMBICON MSTB 2.5, Locking: without, Fastening type: without, Packaging type: packed in a cardboard box

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)

Additional Product Information

Key Commercial Data
Orderkey 1861302
Packing unit 100 pc
Note Made to Order (non-returnable)
GTIN 4055626125411

Weight per Piece (excluding packing) 11.260 g
Custom tariff number 85366990
Country of origin SK (Slovakia)
Dimensions
Length [l] 23.7 mm
Width [w] 45.59 mm
Height [h] 14.3 mm
Pitch 5.08 mm
Dimension a 40.64 mm
General
Range of articles FKCOR 2,5/..-ST
Number of positions 9
Connection method Push-in spring connection
Insulating material group I
Rated surge voltage (III/3) 4 kV
Rated surge voltage (III/2) 4 kV
Rated surge voltage (II/2) 4 kV
Rated voltage (III/3) 250 V
Rated voltage (III/2) 320 V
Rated voltage (II/2) 630 V
Connection in acc. with standard EN-VDE
Nominal current IN 12 A
Nominal cross section 2.5 mm²
Insulating material PA
Flammability rating according to UL 94 V0
Stripping length 10 mm
Connection data
Conductor cross section solid min. 0.2 mm²
Conductor cross section solid max. 2.5 mm²
Conductor cross section flexible min. 0.2 mm²
Conductor cross section flexible max. 2.5 mm²
Conductor cross section flexible, with ferrule without plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max. 2.5 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min. 0.14 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max. 2.5 mm²
Conductor cross section AWG min. 24
Conductor cross section AWG max. 12
Standards and Regulations
Connection in acc. with standard EN-VDE
Flammabilit...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / FKCOR 2,5/ 9-ST-5,08 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.