
INDUSTRIAL COMPONENT DATA

FLKMS 34 2281571 PHOENIX CONTACT Interface module

Brand: PHOENIX CONTACT | Manufacturer Part Number: FLKMS 34

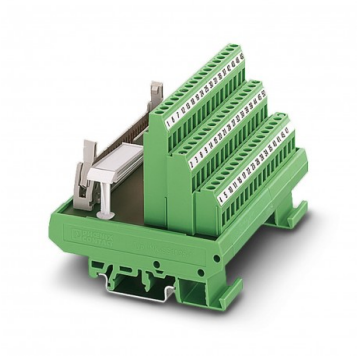

Manufacturer	PHOENIX CONTACT
MPN / Reference	FLKMS 34
Catalog number	2281571
Category	Interface module
Minimum order	1 Pcs
Document ID	EO-4BEAC4A386
Generated	2026-11-19

Product Overview

Interface module
VARIOFACE module, with screw connection and flat cable plug-in connector, for mounting on NS 32 or NS 35/7.5, with male connector as well as short and long locking triggers for female connectors, number of poles 34
VARIOFACE module, with screw connection and ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin header and short and long locking pawls for spring headers, number of poles 34

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > INTERFACE Components (IF)

Additional Product Information

Key Commercial Data
Orderkey 2281571
Packing unit 5 pc
Note Made to Order (non-returnable)
Catalog page Page 243 (IF-2007)
GTIN 4017918054823
Weight per Piece (excluding packing) 190.520 g
Custom tariff number 85369010
Country of origin DE (Germany)
Dimensions
Width 79 mm
Height 77 mm

Depth 72 mm
Ambient conditions
Ambient temperature (operation) -20 °C ... 50 °C
Ambient temperature (storage/transport) -20 °C ... 70 °C
General
Max. perm. operating voltage < 50 V AC
60 V DC
Max. perm. current (per branch) 1 A
Number of positions 34
Mounting position any
Degree of protection IP20
Connection data for connection 1
Connection name Field level
Connection in acc. with standard IEC / EN
Connection method Screw connection
Stripping length 8 mm
Screw thread M3
Conductor cross section solid 0.2 mm² ... 4 mm²
Conductor cross section flexible 0.2 mm² ... 2.5 mm²
Conductor cross section AWG 24 ... 12
Standards and Regulations
Standards/regulations IEC 60664
DIN EN 50178
Rated insulation voltage 63 V
Rated surge voltage 0.6 kV
Insulation Functional insulation
Degree of pollution 2
Overvoltage category II
Environmental Product Compliance
REACh SVHC Lead 7439-92-1
China RoHS Environmentally Friendly Use Period = 50
For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”
Classifications
eCl@ss 4.027250313eCl@ss 4.127250313eCl@ss 5.027250313eCl@ss 5.127250300eCl@ss 6.027242600eCl@ss 7.027141152eCl@ss 8.027141152eCl@ss 9.027141152
ETIM 4.0EC002780ETIM...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / FLKMS 34 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.