
INDUSTRIAL COMPONENT DATA

# FLKMS 40 2281584 PHOENIX CONTACT Interface module

**Brand: PHOENIX CONTACT | Manufacturer Part Number: FLKMS 40**

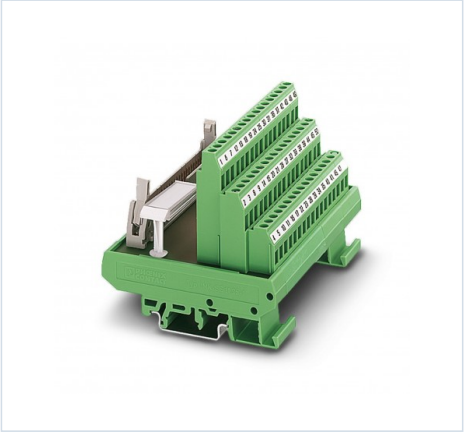

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | FLKMS 40 |
| Catalog number | 2281584 |
| Category | Interface module |
| Minimum order | 1 Pcs |
| Document ID | EO-AA49408373 |
| Generated | 2026-11-19 |

## Product Overview

Interface module
VARIOFACE module, with screw connection and plug-in connector for flat cable, for mounting on NS 32 or NS 35/7.5, with male connector, as well as short and long locking triggers for female connectors, number of poles 40
VARIOFACE module, with screw connection and flat-ribbon cable connector, for mounting on NS 32 or NS 35/7.5, with pin strip and short and long locking latches for socket strips, 40-pos.

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > INTERFACE Components (IF) |

## Additional Product Information

Key Commercial Data
Orderkey 2281584
Packing unit 5 pc
Note Made to Order (non-returnable)
Catalog page Page 243 (IF-2007)
GTIN 4017918054830
Weight per Piece (excluding packing) 169.090 g
Custom tariff number 85369010
Country of origin DE (Germany)
Dimensions
Width 79 mm
Height 77 mm

Depth 72 mm
Ambient conditions
Ambient temperature (operation) -20 °C ... 50 °C
Ambient temperature (storage/transport) -20 °C ... 70 °C
General
Max. perm. operating voltage < 50 V AC
60 V DC
Max. perm. current (per branch) 1 A
Number of positions 40
Mounting position any
Degree of protection IP20
Connection data for connection 1
Connection name Field level
Connection in acc. with standard IEC / EN
Connection method Screw connection
Stripping length 8 mm
Screw thread M3
Conductor cross section solid 0.2 mm² ... 4 mm²
Conductor cross section flexible 0.2 mm² ... 2.5 mm²
Conductor cross section AWG 24 ... 12
Standards and Regulations
Standards/regulations IEC 60664
DIN EN 50178
Rated insulation voltage 63 V
Rated surge voltage 0.6 kV
Insulation Functional insulation
Degree of pollution 2
Overvoltage category II
Environmental Product Compliance
REACh SVHC Lead 7439-92-1
China RoHS Environmentally Friendly Use Period = 50
For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”
Classifications
eCl@ss 4.027250313eCl@ss 4.127250313eCl@ss 5.027250313eCl@ss 5.127250300eCl@ss 6.027242600eCl@ss 7.027141152eCl@ss 8.027141152eCl@ss 9.027141152
ETIM 4.0EC002780ETIM...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / FLKMS 40 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.