
INDUSTRIAL COMPONENT DATA

UM-DELTAV/A/SI/BFI/TP 5603258 PHOENIX CONTACT Passive module

Brand: PHOENIX CONTACT | Manufacturer Part Number: UM-DELTAV/A/SI/BFI/TP

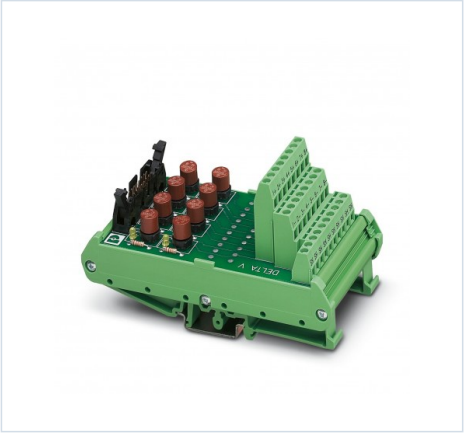

Manufacturer	PHOENIX CONTACT
MPN / Reference	UM-DELTAV/A/SI/BFI/TP
Catalog number	5603258
Category	Interface module
Minimum order	1 Pcs
Document ID	EO-F7B315BF4B
Generated	2026-11-18

Product Overview

Passive module
Fuse module with separable test sockets, fuse fault indication and terminal blocks for connection display (for analogue cards of the Delta V controller)
Fuse module with separable test sockets, fuse failure display and shield connection terminals (for analog cards of the Delta V control system)

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > INTERFACE Components (IF)

Additional Product Information

Technical dataProduct propertiesProduct type Interface module
Product family VARIOFACE
Number of positions 16
No. of channels 8
Data management status
Article revision 07
Electrical propertiesNominal voltage UN 24 V DC
Max. current carrying capacity per branch 50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted)
Supported controller EMERSON DeltaV
Suitable I/O card VE4003S2B4
VE4005S2B3

VE4003S2B5
SE4003S2B4
Connection dataField level
Connection method Screw connection
Stripping length 7 mm
Screw thread M3
Conductor cross section rigid 0.2 mm² ... 4 mm²
Conductor cross section flexible 0.2 mm² ... 2.5 mm²
Conductor cross section AWG 24 ... 12
Controller level
Connection method IDC/FLK pin strip
Number of connections 1
Number of positions 16
Pitch 2.54 mm
SignalingStatus display present Yes, if the fuse fails
DimensionsItem dimensions
Width 61 mm
Height 126 mm
Depth 71 mm
Material specificationsHousing insulation material Polyamide PA non-reinforced
Environmental and real-life conditionsAmbient conditions
Ambient temperature (operation) -20 °C ... 50 °C
Ambient temperature (storage/transport) -20 °C ... 70 °C
Standards and regulationsStandards/regulations IEC 60664
DIN EN 50178
MountingMounting type DIN rail mounting
Mounting position any
NotesNotes on operation For proper use, the specifications of the installation directive (see Downloads) must be observed.
For applications or use with third-party products, the specifications, and the safety and warning in...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UM-DELTAV/A/SI/BFI/TP with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.