
INDUSTRIAL COMPONENT DATA

# GMSTB 2,5/ 4-ST-7,62 BDERDEUVW 1711129 PHOENIX CONTACT Printed-circuit board connector

**Brand: PHOENIX CONTACT | Manufacturer Part Number: GMSTB 2,5/ 4-ST-7,62 BDERDEUVW**

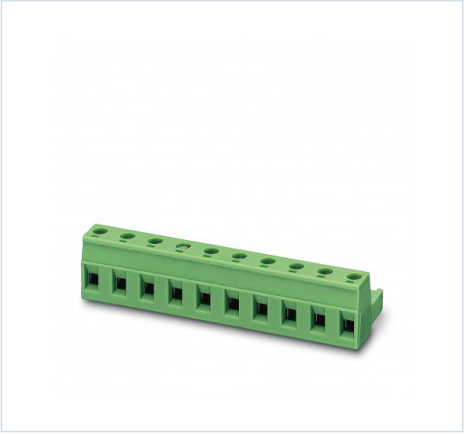

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | GMSTB 2,5/ 4-ST-7,62 BDERDEUVW |
| Catalog number | 1711129 |
| Category | Cable connector |
| Minimum order | 1 Pcs |
| Document ID | EO-E7515E4DDA |
| Generated | 2026-11-19 |

## Product Overview

Printed-circuit board connector
Connector for printed circuit board, nominal section: 2.5 mm², color: green, nominal current: 12 A, dimensioning voltage (III/2): 630 V, contact surface: Tin, contact type: Female connection, Number of potentials: 4, Number of rows: 1, Number of poles per row: 4, number of connections: 4, family of articles: GMSTB 2.5/.. -ST, pitch: 7.62 mm, connection type: Screw connection with traction capsule, connection direction driver/printed circuit board: 0 °, Stecksystem: CLASSIC COMBICON, Lock: without, packaging type: boxed
PCB connector, nominal cross section: 2.5 mm2, color: green, nominal current: 12 A, rated voltage (III/2): 630 V, contact surface: Sn, contact connection type: Socket, number of potentials: 4, number of rows: 1, number of positions: 4, number of connections: 4, product range: GMSTB 2,5/..-ST, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON MSTB 2,5, locking: without, mounting: without, type of packaging: packed in cardboard

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > PCB Connectors (PCC) |

## Additional Product Information

Technical dataProduct propertiesProduct type PCB connector
Product family GMSTB 2,5/..-ST
Product line COMBICON Connectors M
Type Standard
Number of positions 4

Pitch 7.62 mm
Number of connections 4
Number of rows 1
Number of potentials 4
Mounting flange without
Data management status
Article revision 03
Electrical propertiesNominal current IN 12 A
Nominal voltage UN 630 V
Contact resistance 1.3 m?
Rated voltage (III/3) 400 V
Rated surge voltage (III/3) 6 kV
Rated voltage (III/2) 630 V
Rated surge voltage (III/2) 6 kV
Rated voltage (II/2) 1000 V
Rated surge voltage (II/2) 6 kV
Connection dataConnection technology
Type Standard
Connector system COMBICON MSTB 2,5
Nominal cross section 2.5 mm²
Contact connection type Socket
Interlock
Locking type without
Mounting flange without
Conductor connection
Connection method Screw connection with tension sleeve
Conductor/PCB connection direction 0 °
Conductor cross section rigid 0.2 mm² ... 2.5 mm²
Conductor cross section flexible 0.2 mm² ... 2.5 mm²
Conductor cross section AWG 24 ... 12
Conductor cross section flexible, with ferrule without plastic sleeve 0.25 mm² ... 2.5 mm²
Conductor cross section, flexible, with ferrule, with plastic sleeve 0.25 mm² ... 2.5 mm²
2 conductors with same cross section, solid 0.2 mm² ... 1 mm²
2 conductors with same cross section, flexible 0.2 mm² ... 1.5 mm²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve 0.25 mm² ... 1 mm²
2 conductors with the same cross section, fl...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / GMSTB 2,5/ 4-ST-7,62 BDERDEUVW with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.