
INDUSTRIAL COMPONENT DATA

UKK 5-PE 2774211 PHOENIX CONTACT Ground modular terminal block

Brand: PHOENIX CONTACT | Manufacturer Part Number: UKK 5-PE

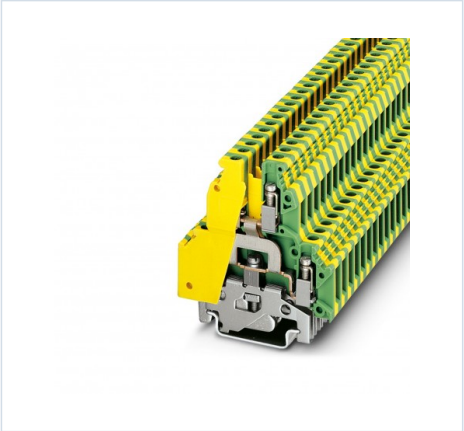

Manufacturer	PHOENIX CONTACT
MPN / Reference	UKK 5-PE
Catalog number	2774211
Category	Ground terminal block
Minimum order	50 Pcs
Document ID	EO-127E464332
Generated	2026-11-18

Product Overview

Ground modular terminal block
Terminal block, number of connections: 4, connection type: Screw connection, 1st and 2nd floor, cross-section: 0.2 mm² - 4 mm², fixing type: PE foot with fixing screw, M3, mounting class: NS 35/7.5, NS 35/15, NS 32, color: yellow-green
Ground terminal, number of connections: 4, connection method: Screw connection, 1st and 2nd level, cross section: 0.2 mm2 - 4 mm2, mounting: PE foot with mounting screw, M3, mounting type: NS 35/7,5, NS 35/15, NS 32, color: green-yellow

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs

Additional Product Information

Technical dataProduct propertiesProduct type Ground terminal block
Number of connections 4
Number of rows 2
Data management status
Article revision 08
Insulation characteristics
Overvoltage category III
Degree of pollution 3
Electrical propertiesRated surge voltage 6 kV
Maximum power dissipation for nominal condition 1.02 W
Connection dataGrounding foot Yes

Number of connections per level 2
Nominal cross section 4 mm²
1st and 2nd level
Screw thread M3
Note Please observe the current carrying capacity of the DIN rails.
Tightening torque 0.6 ... 0.8 Nm
Stripping length 8 mm
Connection in acc. with standard IEC 60947-7-2
Conductor cross section rigid 0.2 mm² ... 4 mm²
Cross section AWG 24 ... 12 (converted acc. to IEC)
Conductor cross section flexible 0.2 mm² ... 4 mm²
Conductor cross section, flexible [AWG] 24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve) 0.25 mm² ... 4 mm²
Flexible conductor cross section (ferrule with plastic sleeve) 0.25 mm² ... 2.5 mm²
DimensionsWidth 6.2 mm
Height 56 mm
Depth on NS 32 67 mm
Depth on NS 35/7,5 62 mm
Depth on NS 35/15 69.5 mm
Material specificationsColor green-yellow
Flammability rating according to UL 94 V2
Insulating material group I
Insulating material PA
Static insulating material application in cold -60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) 130 °C
Relative insulation material temperature index (Elec., UL 746 B) 130 °C
Fire protection for rail vehicl...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UKK 5-PE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.