
INDUSTRIAL COMPONENT DATA

MSTBV 2,5/11-GF-5,08 EX 1796416 PHOENIX CONTACT Printed-circuit board connector

Brand: PHOENIX CONTACT | Manufacturer Part Number: MSTBV 2,5/11-GF-5,08 EX

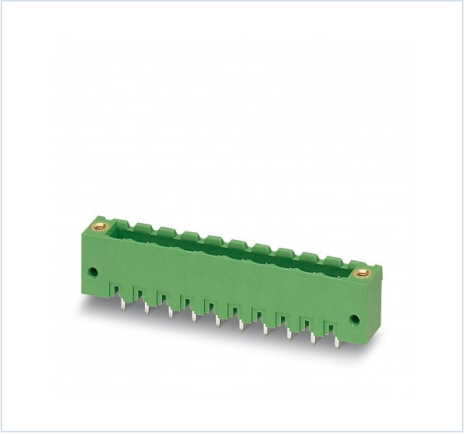

Manufacturer	PHOENIX CONTACT
MPN / Reference	MSTBV 2,5/11-GF-5,08 EX
Catalog number	1796416
Category	Printed circuit board connector
Minimum order	50 Pcs
Document ID	EO-8DA97F1A8E
Generated	2026-11-18

Product Overview

Printed-circuit board connector
Printed circuit board base housing, nominal section: 2.5 mm², color: green, nominal current: 12 A, contact surface: Tin, contact type: Male, number of rows: 1, number of poles: 11, family of articles: MSTBV 2.5/.. -GF-EX, pitch: 5.08 mm, mounting: Wave soldering, pin arrangement: Linear pin arrangement, pin length [P]: 3.9 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2.5, Plug-in face orientation: Standard, locking: Screw lock, fixing type: Overhead clamping (thread), packaging type: boxed
PCB base socket, nominal cross-section: 2.5 mm2, colour: green, rated current: 12 A, contact surface: Sn, contact connection type: plug, number of rows: 1, number of poles: 11, product series: MSTBV 2.5/.. -GF-EX, pitch: 5.08 mm, mounting: Wave soldering, pin layout: Linear pinning, pin length [P]: 3.9 mm, number of solder pins per potential: 1, plug system: COMBICON MSTB 2.5 EX, Insertion pin orientation: Standard, locking: Screw locking, fixing type: Threaded flange, package type: packed in carton

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)

Additional Product Information

Key Commercial Data
Orderkey 1796416
Packing unit 50 pc
Note Made to Order (non-returnable)
Catalog page Page 375 (C-1-2013)

GTIN 4046356636520
Weight per Piece (excluding packing) 6.150 g
Custom tariff number 85366930
Country of origin DE (Germany)
Dimensions
Length [l] 8.6 mm
Width 66.04 mm
Pitch 5.08 mm
Dimension a 50.8 mm
Width [w] 66.04 mm
Height [h] 15.9 mm
Height 12 mm
Length of the solder pin 3.9 mm
Length 8.6 mm
General
Range of articles MSTBV 2,5/..-GF-EX
Insulating material group I
Rated voltage (III/3) 250 V
Connection in acc. with standard EN-VDE
Nominal current IN 12 A
Insulating material PA
Flammability rating according to UL 94 V0
Color green
Number of positions 11
Standards and Regulations
Connection in acc. with standard EN-VDE
Flammability rating according to UL 94 V0
Environmental Product Compliance
China RoHS Environmentally Friendly Use Period = 50
For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”
Classifications
eCl@ss 4.0272607xxeCl@ss 4.127260701eCl@ss 5.027260701eCl@ss 5.127260700eCl@ss 6.027260700eCl@ss 7.027440402eCl@ss 8.027440402eCl@ss 9.027440402
ETIM 4.0EC002637ETIM 5.0EC002637ETIM 6.0EC002637
UNSPSC 6.0130211810UNSPSC 7.090139121409UNSPSC 1139121409UNSPSC 12.0139121409UNSPSC 13.239121409

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / MSTBV 2,5/11-GF-5,08 EX with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.