
INDUSTRIAL COMPONENT DATA

UTI 2,5-PE/L/N 3076030 PHOENIX CONTACT Installation ground terminal block, Screw connection, Cross section: ..

Brand: PHOENIX CONTACT | Manufacturer Part Number: UTI 2,5-PE/L/N

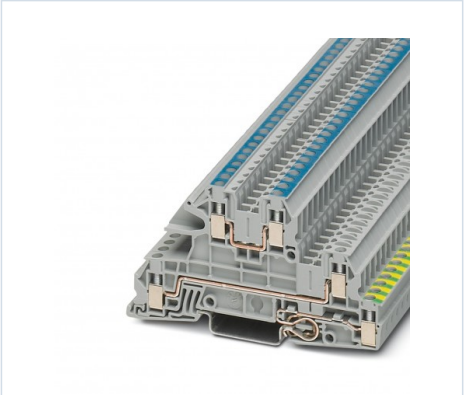

Manufacturer	PHOENIX CONTACT
MPN / Reference	UTI 2,5-PE/L/N
Catalog number	3076030
Category	Multi level installation terminal block
Minimum order	50 Pcs
Document ID	EO-050353D6D7
Generated	2026-11-19

Product Overview

Installation ground terminal block, Screw connection, Cross section: 0.2 mm²
Ground terminal for distribution, nominal voltage: 400 V, nominal current: 24 A, Screw connection, 1., 2. and 3rd floor, Dimensioning cross-section: 4 mm², cross-section: 0.2 mm² - 4 mm², mounting class: NS 35/7.5, NS 35/15, colour: grey
Installation ground terminal block, nom. voltage: 400 V, nominal current: 24 A, Screw connection, 1st, 2nd and 3rd level, Rated cross section: 4 mm2, cross section: 0.2 mm2 - 4 mm2, mounting type: NS 35/7,5, NS 35/15, color: gray

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs

Additional Product Information

Technical dataProduct propertiesProduct type Ground terminal block
Number of connections 5
Number of rows 3
Potentials 2
Data management status
Article revision 04
Insulation characteristics
Overvoltage category III
Degree of pollution 3
Electrical propertiesRated surge voltage 4 kV
6 kV

Maximum power dissipation for nominal condition 1.02 W
Current carrying capacity of the neutral busbar 140 A
Connection dataGrounding foot Yes
Number of connections per level 2
Nominal cross section 4 mm²
1st, 2nd and 3rd level
Screw thread M3
Note Please observe the current carrying capacity of the DIN rails.
Tightening torque 0.5 ... 0.6 Nm
Stripping length 9 mm
Internal cylindrical gage A3
Conductor cross section rigid 0.2 mm² ... 4 mm²
Cross section AWG 24 ... 12 (converted acc. to IEC)
Conductor cross section flexible 0.2 mm² ... 4 mm²
Conductor cross section, flexible [AWG] 24 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve) 0.25 mm² ... 2.5 mm²
Flexible conductor cross section (ferrule with plastic sleeve) 0.25 mm² ... 2.5 mm²
2 conductors with same cross section, solid 0.2 mm² ... 1.5 mm²
2 conductors with same cross section, flexible 0.2 mm² ... 1.5 mm²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve 0.25 mm² ... 0.75 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve 0.5 mm² ... 0.75 mm²
Nominal current 24 A (with 4 mm² conductor cross section)
Maximum load...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UTI 2,5-PE/L/N with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.