
INDUSTRIAL COMPONENT DATA

PSM PTK 2760623 PHOENIX CONTACT Connection distributor

Brand: PHOENIX CONTACT | Manufacturer Part Number: PSM PTK

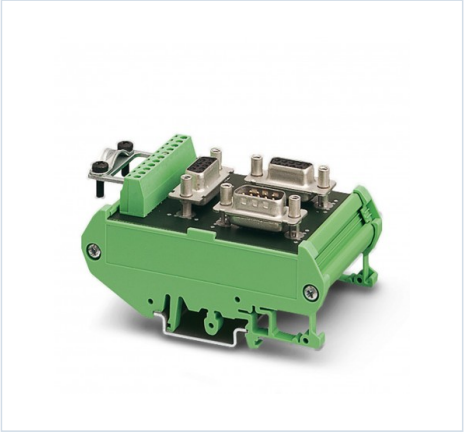

Manufacturer	PHOENIX CONTACT
MPN / Reference	PSM PTK
Catalog number	2760623
Category	Interface module
Minimum order	1 Pcs
Document ID	EO-FA364D4775
Generated	2026-11-18

Product Overview

Connection distributor
RS-485 passive T-shunt, equipped with one 9-pin D-SUB male connector and two 9-pole D-SUB female connectors
Passive RS-485 T-distributor, fitted with one 9-pin D-SUB pin strip and two 9-pin D-SUB socket strips

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Safety

Additional Product Information

Technical dataNotesNote on application
Note on application Only for industrial use
Product propertiesProduct type Adapter
Application Standard
Pin assignment all 1:1
Data management status
Article revision 10
Electrical propertiesTest voltage 500 V AC (50 Hz, 1 min, rms)
Nominal voltage UN 60 V AC/DC
Nominal current IN 1 A
Transmission medium Copper
Connection dataIncoming
Connection method D-SUB 9 plug
Outgoing

Connection method D-SUB-9 female connector
Branching
Connection method D-SUB-9 female connector
Branching
Connection method COMBICON connectors
Conductor cross section, rigid min. 0.14 mm²
Conductor cross section, rigid max. 1.5 mm²
Conductor cross section flexible min. 0.14 mm²
Conductor cross section flexible max. 1.5 mm²
Conductor cross section AWG min. 26
Conductor cross section AWG max. 16
InterfacesBus system RS-485
DimensionsWidth 56 mm
Height 89.6 mm
Length 48 mm
Material specificationsColor (Housing) green (RAL 6021)
Material (Housing) PVC
Flammability rating according to UL 94 V0
Cable/lineShielding D-SUB frame or shield clamp
Environmental and real-life conditionsAmbient conditions
Degree of protection IP20
Ambient temperature (operation) -25 °C ... 70 °C
Standards and regulationsFree from substances that could impair the application of coating VDMA 24364:2018-05

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / PSM PTK with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.