
INDUSTRIAL COMPONENT DATA

PC 6-16/ 4-G-10,16 BUGY NZ11801 1943959 PHOENIX CONTACT Feed-through header

Brand: PHOENIX CONTACT | Manufacturer Part Number: PC 6-16/ 4-G-10,16 BUGY NZ11801

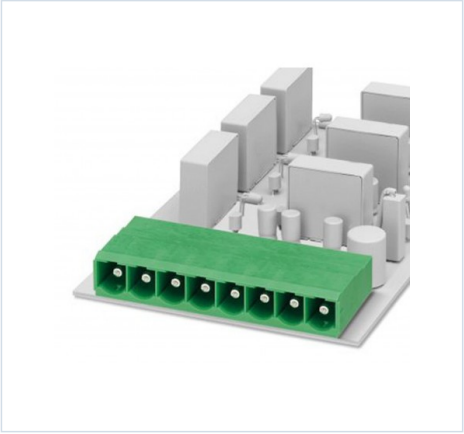

Manufacturer	PHOENIX CONTACT
MPN / Reference	PC 6-16/ 4-G-10,16 BUGY NZ11801
Catalog number	1943959
Category	Printed circuit board connector
Minimum order	50 Pcs
Document ID	EO-DA43114395
Generated	2026-11-19

Product Overview

Feed-through header
Printed circuit board base housing, nominal section: 6 mm², color: bluish gray, nominal current: 76 A (41 A in combination with PC 6 connector), nominal voltage (III/2): 1000 V, contact surface: silver, contact type: Male, number of potentials: 4, number of rows: 1, number of poles: 4, number of connections: 4, family of articles: PC 6-16/.. -G, pitch: 10.16 mm, mounting: Wave soldering, pin arrangement: Linear pin arrangement, pin length [P]: 4 mm, number of solder pins per potential: 3, plug-in system: COMBICON PC 16, Plug-in face orientation: Standard, locking: without, fixing type: without, packaging type: boxed
PCB base strip, nominal cross-section: 6 mm2, colour: blue-grey, rated current: 76 A (41 A in combination with PC 6 plug), rated voltage (III/2): 1000 V, contact surface: Ag, contact type: pin, number of potentials: 4, number of rows: 1, number of poles: 4, number of terminals: 4, article family: PC 6-16/.. -G, Pitch: 10.16 mm, Mounting: wave soldering, Pin layout: Linear pinning, Pin length [P]: 4 mm, Number of solder pins per potential: 3, Plug-in system: COMBICON PC 16, Mating face orientation: Standard, Locking: without, Mounting type: without, Packaging type: packed in a carton

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)

Additional Product Information

Key Commercial Data
Orderkey 1943959
Packing unit 50 pc
Note Made to Order (non-returnable)

GTIN 4017918850906
Weight per Piece (excluding packing) 15.960 g
Custom tariff number 85366990
Country of origin PL (Poland)
Dimensions
Length [l] 32 mm
Width 43.68 mm
Pitch 10.16 mm
Dimension a 30.48 mm
Width [w] 43.68 mm
Height [h] 17.7 mm
Height 13.7 mm
Length of the solder pin 4 mm
Pin dimensions 1 x 1.2 mm
Length 32 mm
General
Range of articles PC 6-16/..-G
Insulating material group I
Rated surge voltage (III/3) 8 kV
Rated surge voltage (III/2) 8 kV
Rated surge voltage (II/2) 6 kV
Rated voltage (III/3) 630 V
Rated voltage (III/2) 1000 V
Rated voltage (II/2) 1000 V
Connection in acc. with standard EN-VDE
Nominal current IN 76 A (41 A in combination with PC 6 plug)
Maximum load current 76 A
Color blue grey
Number of positions 4
Standards and Regulations
Connection in acc. with standard EN-VDE
CUL
Environmental Product Compliance
China RoHS Environmentally friendly use period: unlimited = EFUP-e
No hazardous substances above threshold values
Classifications
eCl@ss 4.0272607xxeCl@ss 4.127260701eCl@ss 5.027260701eCl@ss 5.127260700eCl@ss 6.027260700eCl@ss 7.027440402eCl@ss 8.027440402eCl@ss 9.027440402
ETIM 3.0EC001121ETIM 4.0EC002637ETIM 5.0EC002637ETIM 6.0EC002637
UNSPSC 6.0130211810UNSPSC 7.090139121409UNSPSC 1139121409UNSPSC 12.0139121409UNSPSC 13.239121409

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / PC 6-16/ 4-G-10,16 BUGY NZ11801 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.