
INDUSTRIAL COMPONENT DATA

DFK-PC 5/ 6-STF-SH-7,62 1716768 PHOENIX CONTACT Feed-through plug

Brand: PHOENIX CONTACT | Manufacturer Part Number: DFK-PC 5/ 6-STF-SH-7,62

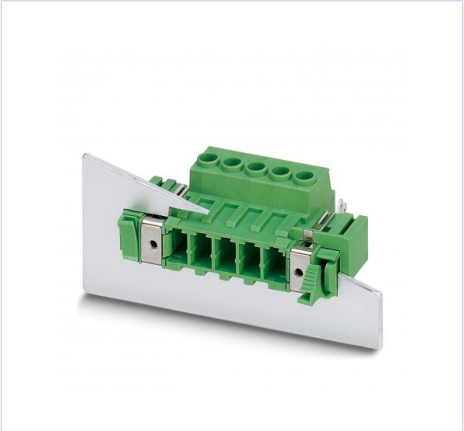

Manufacturer	PHOENIX CONTACT
MPN / Reference	DFK-PC 5/ 6-STF-SH-7,62
Catalog number	1716768
Category	Cable connector
Minimum order	10 Pcs
Document ID	EO-7A1E6F747B
Generated	2026-11-18

Product Overview

Feed-through plug
Wall pass block, nominal section: 6 mm², color: green, nominal current: 41 A, nominal voltage (III/2): 1000 V, contact surface: Tin, contact type: Male, number of potentials: 6, number of rows: 1, number of poles: 6, number of connections: 6, family of articles: DFK-PC 5/.. -STF-SH, pitch: 7.62 mm, connection type: Screw connection with traction capsule, screw clamping form: Z1L Pozidriv with longitudinal groove, driver/printed circuit board connection direction: 0 °, plug-in system: COMBICON PC 5, Plug-in face orientation: Standard, locking: Screw lock, fixing type: Air clamping (screw), packing type: Boxed Packaging
Feed-through connector, nominal cross section: 6 mm2, color: green, nominal current: 41 A, rated voltage (III/2): 1000 V, contact surface: Sn, contact connection type: Pin, number of potentials: 6, number of rows: 1, number of positions: 6, number of connections: 6, product range: DFK-PC 5/.. -STF-SH, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, screw head form: Z1L Slotted Pozidriv, conductor/PCB connection direction: 0 °, plug-in system: COMBICON PC 5, Electrical properties: shielded, Pin connector pattern alignment: Standard, locking: Screw locking mechanism, mounting: Screw flange, type of packaging: packed in cardboard

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)

Additional Product Information

Key Commercial Data
Orderkey 1716768
Packing unit 10 pc

Minimum order quantity 10 pc
Note Made to Order (non-returnable)
Catalog page Page 549 (C-1-2013)
GTIN 4046356137386
Weight per Piece (excluding packing) 34.120 g
Custom tariff number 85366990
Country of origin PL (Poland)
Dimensions
Length [l] 48.95 mm
Width [w] 80.34 mm
Height [h] 26.24 mm
Pitch 7.62 mm
Dimension a 38.1 mm
General
Range of articles DFK-PC 5/..-STF-SH
Number of positions 6
Connection method Screw connection with tension sleeve
Insulating material group I
Rated surge voltage (III/3) 8 kV
Rated surge voltage (III/2) 8 kV
Rated surge voltage (II/2) 6 kV
Rated voltage (III/3) 1000 V
Rated voltage (III/2) 1000 V
Rated voltage (II/2) 1000 V
Connection in acc. with standard EN-VDE
Nominal current IN 41 A
Nominal cross section 6 mm²
Maximum load current 41 A
Insulating material PA
Flammability rating according to UL 94 V0
Stripping length 10 mm
Screw thread M3
Tightening torque, min 0.7 Nm
Tightening torque max 0.8 Nm
Connection data
Conductor cross section solid min. 0.2 mm²
Conductor cross section solid max. 10 mm²
Conductor cross section flexible min. 0.2 mm²
Conductor cross section flexible max. 6 mm²
Conductor cross section flexible, with ferrule without plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max. 6 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule with plasti...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / DFK-PC 5/ 6-STF-SH-7,62 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.