
INDUSTRIAL COMPONENT DATA

# FKICS 2,5/14-STD-5,08-RN 1808844 PHOENIX CONTACT Printed-circuit board connector

**Brand: PHOENIX CONTACT | Manufacturer Part Number: FKICS 2,5/14-STD-5,08-RN**

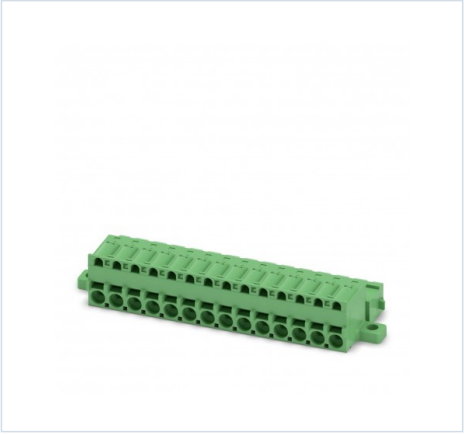

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | FKICS 2,5/14-STD-5,08-RN |
| Catalog number | 1808844 |
| Category | Cable connector |
| Minimum order | 50 Pcs |
| Document ID | EO-BF2392CC44 |
| Generated | 2026-11-18 |

## Product Overview

Printed-circuit board connector
Connector for printed circuit board, nominal section: 2.5 mm², color: green, nominal current: 12 A, nominal voltage (III/2): 320 V, contact surface: Tin, contact type: Male, number of potentials: 14, number of rows: 1, number of poles: 14, number of connections: 14, family of articles: FKICS 2.5/.. -STD-RN, pitch: 5.08 mm, connection type: Push-in spring connection, conductor/printed circuit board connection direction: 0°, clamping hook: - without clamping hook, plug-in system: COMBICON MSTB 2.5, locking: Snap lock, fixing type: Socket protrusion, packaging type: boxed
PCB connector, nominal cross section: 2.5 mm2, color: green, nominal current: 12 A, rated voltage (III/2): 320 V, contact surface: Sn, contact connection type: Pin, number of potentials: 14, number of rows: 1, number of positions: 14, number of connections: 14, product range: FKICS 2,5/.. -STD-RN, pitch: 5.08 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, locking clip: - without locking clip, plug-in system: COMBICON MSTB 2,5, locking: Snap-in locking, mounting: Engagement nose, type of packaging: packed in cardboard

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > PCB Connectors (PCC) |

## Additional Product Information

Key Commercial Data
Orderkey 1808844
Packing unit 50 pc
Note Made to Order (non-returnable)
Catalog page Page 289 (C-1-2013)

GTIN 4046356701631
Weight per Piece (excluding packing) 22.480 g
Custom tariff number 85366990
Country of origin DE (Germany)
Dimensions
Length [ l ] 26.4 mm
Width [ w ] 84.34 mm
Height [ h ] 15 mm
Pitch 5.08 mm
Dimension a 66.04 mm
General
Range of articles FKICS 2,5/..-STD-RN
Number of positions 14
Connection method Push-in spring connection
Insulating material group I
Rated surge voltage (III/3) 4 kV
Rated surge voltage (III/2) 4 kV
Rated surge voltage (II/2) 4 kV
Rated voltage (III/3) 320 V
Rated voltage (III/2) 320 V
Rated voltage (II/2) 630 V
Connection in acc. with standard EN-VDE
Nominal current IN 12 A
Nominal cross section 2.5 mm²
Maximum load current 12 A
Insulating material PA
Flammability rating according to UL 94 V0
Internal cylindrical gage A2
Stripping length 10 mm
Connection data
Conductor cross section solid min. 0.2 mm²
Conductor cross section solid max. 2.5 mm²
Conductor cross section flexible min. 0.2 mm²
Conductor cross section flexible max. 2.5 mm²
Conductor cross section flexible, with ferrule without plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule without plastic sleeve max. 2.5 mm²
Conductor cross section flexible, with ferrule with plastic sleeve min. 0.25 mm²
Conductor cross section flexible, with ferrule with plastic sleeve max. 2.5 mm²
Conductor cross section AWG min. 24
Conductor cross section....

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / FKICS 2,5/14-STD-5,08-RN with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.