
INDUSTRIAL COMPONENT DATA

# FBS 3-8 GY 3032622 PHOENIX CONTACT Plug-in bridge

**Brand: PHOENIX CONTACT | Manufacturer Part Number: FBS 3-8 GY**

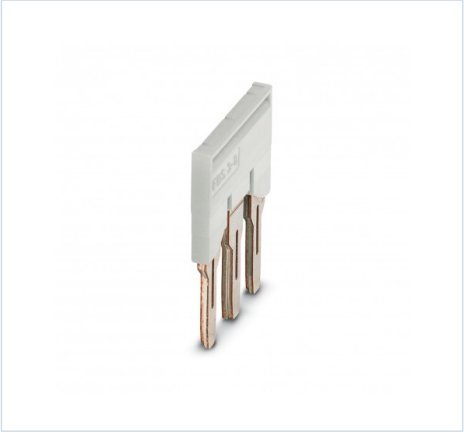

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | FBS 3-8 GY |
| Catalog number | 3032622 |
| Category | Cross-connector for terminal block |
| Minimum order | 10 Pcs |
| Document ID | EO-5FBE4A0F5F |
| Generated | 2026-11-18 |

## Product Overview

Plug-in bridge
Plug-in bridge, pitch: 8.2 mm, colour: grey
Plug-in bridge, pitch: 8.2 mm, number of positions: 3, color: gray

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > Modular TBs |

## Additional Product Information

Technical dataProduct propertiesProduct type Jumper
Number of positions 3
Pitch 8.2 mm
Data management status
Article revision 04
Electrical propertiesMaximum load current 41 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
Connection dataMaximum load current 41 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.)
DimensionsWidth 22.9 mm
Height 29.6 mm
Depth 29.6 mm
Pitch 8.2 mm

Material specificationsColor gray (RAL 7042)
Material Copper
Flammability rating according to UL 94 V0
Insulating material PA
Environmental and real-life conditionsAmbient conditions
Ambient temperature (operation) -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport) -25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly) -5 °C ... 70 °C
Ambient temperature (actuation) -5 °C ... 70 °C
Permissible humidity (operation) 20 % ... 90 %
Permissible humidity (storage/transport) 30 % ... 70 %
MountingMounting type Plug-in mounting

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / FBS 3-8 GY with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.