
INDUSTRIAL COMPONENT DATA

# EMG 10-REL/KSR-G 24/21-LC AU 2940090 PHOENIX CONTACT Relay Module

**Brand: PHOENIX CONTACT | Manufacturer Part Number: EMG 10-REL/KSR-G 24/21-LC AU**

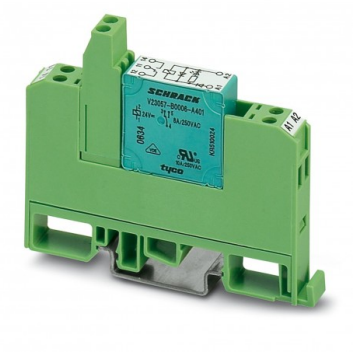

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | EMG 10-REL/KSR-G 24/21-LC AU |
| Catalog number | 2940090 |
| Category | Switching relay |
| Minimum order | 10 Pcs |
| Document ID | EO-0A6613BA95 |
| Generated | 2026-11-18 |

## Product Overview

Relay Module
Relay module, with soldered mini-switching relay, gold contact for small powers, 1 switched contact, input voltage 24 V DC

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > Industrial Relays |

## Additional Product Information

Key Commercial Data
Orderkey 2940090
Packing unit 10 pc
Catalog page Page 134 (IF-2011)
GTIN 4017918079864
Weight per Piece (excluding packing) 38.010 g
Custom tariff number 85364190
Country of origin DE (Germany)
Note
Utilization restriction EMC: class A product, see manufacturer's declaration in the download area
Dimensions
Width 10.6 mm
Height 75 mm
Depth 62.5 mm

Ambient conditions
Ambient temperature (operation) -20 °C ... 40 °C
Ambient temperature (storage/transport) -20 °C ... 70 °C
Coil side
Nominal input voltage UN 24 V DC
Input voltage range in reference to UN 0.8 ... 1.1
Typical input current at UN 21 mA
Typical response time 7 ms
Typical release time 11 ms
Protective circuit Reverse polarity protection Polarity protection diode
Free-wheeling diode Damping diode
Operating voltage display Yellow LED
Power dissipation for nominal condition 0.5 W
Contact side
Contact type Double contact, 1 PDT
Type of switch contact Double contact
Contact material AgPd60, hard gold-plated
Maximum switching voltage 30 V AC
36 V DC
Maximum inrush current 0.2 A
Limiting continuous current 0.5 A
Interrupting rating (ohmic load) max. 5 W (at 24 V DC)
Contact side (with destroyed gold layer)
Note the following values are applicable if a gold layer is destroyed
Maximum switching voltage 125 V AC
150 V DC
Limiting continuous current 2 A
Maximum inrush current 2 A
Interrupting rating (ohmic load) max. 29 W (at 24 V DC)
29 W (at 48 V DC)
29 W (at 60 V DC)
General
Test voltage relay winding/rela...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / EMG 10-REL/KSR-G 24/21-LC AU with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.