
INDUSTRIAL COMPONENT DATA

DIKD 1,5-TG 2774237 PHOENIX CONTACT Sensor/actuator terminal block

Brand: PHOENIX CONTACT | Manufacturer Part Number: DIKD 1,5-TG

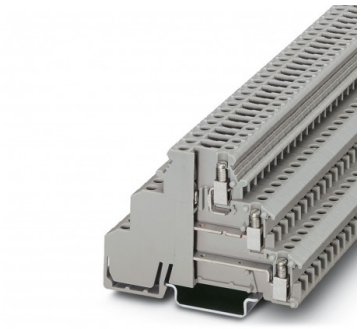

Manufacturer	PHOENIX CONTACT
MPN / Reference	DIKD 1,5-TG
Catalog number	2774237
Category	Sensor/actuator terminal block
Minimum order	50 Pcs
Document ID	EO-EA249BDDA7
Generated	2026-11-18

Product Overview

Sensor/actuator terminal block
Terminal for detectors/actuators, The current and voltage are determined by the connector used., nominal voltage: 250 V, nominal current: 15 A, 1., 2. and 3rd floor, connection type: Screw connection, Dimensioning section: 2.5 mm², section: 0.2 mm² - 4 mm², connection type: Screw connection, Dimensioning section: 2.5 mm², section: 0.2 mm² - 4 mm², Mounting: NS 35/7.5, NS 35/15, color: gray
Terminal block for sensors/actuators, Amperage and voltage depend on the plug used., Nominal voltage: 250 V, Nominal current: 15 A, 1., 2. and 3. Floor, connection type: Screwed connection, Reference section: 2.5 mm2, cross-section: 0.2 mm2 - 4 mm2, connection type: Screwed connection, Reference section: 2.5 mm2, Cross-section: 0.2 mm2 - 4 mm2, mounting: NS 35/7.5, NS 35/15, colour: grey

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs

Additional Product Information

Key Commercial Data
Orderkey 2774237
Packing unit 50 pc
Catalog page Page 445 (C-1-2017)
GTIN 4017918126773
Weight per Piece (excluding packing) 20.150 g
Custom tariff number 85369010

Country of origin PL (Poland)
General
Number of levels 3
Number of connections 6
Nominal cross section 2.5 mm²
Color gray
Insulating material PA
Flammability rating according to UL 94 V2
Rated surge voltage 4 kV
Degree of pollution 3
Overvoltage category III
Insulating material group I
Maximum power dissipation for nominal condition 0.77 W (the value is multiplied when connecting multiple levels)
Connection in acc. with standard IEC 60947-7-1
Nominal current IN 15 A
Maximum load current 15 A (with 4 mm² conductor cross section)
Nominal voltage UN 250 V (the voltage is determined by the component used)
Connection in acc. with standard IEC 60947-7-1
Nominal current IN(upper level) 15 A
Maximum load current (upper level) 15 A (with 4 mm² conductor cross section)
Nominal voltage UN 250 V
Open side panel No
Shock protection test specification DIN EN 50274 (VDE 0660-514):2002-11
Back of the hand protection guaranteed
Finger protection guaranteed
Result of surge voltage test Test passed
Surge voltage test setpoint 4.8 kV
Result of power-frequency withstand voltage test Test passed
Power frequency withstand voltage setpoint 1.5 kV
Checking the mechanical stability of terminal points (5 x conductor connection) Test passed
Result of bending test Test passed
Bending test rotation speed 10 rpm
Bending test...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / DIKD 1,5-TG with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.