
INDUSTRIAL COMPONENT DATA

# WMS-2 HF 38,1 (60X60)RL YE 0833207 PHOENIX CONTACT Shrink sleeve

**Brand: PHOENIX CONTACT | Manufacturer Part Number: WMS-2 HF 38,1 (60X60)RL YE**

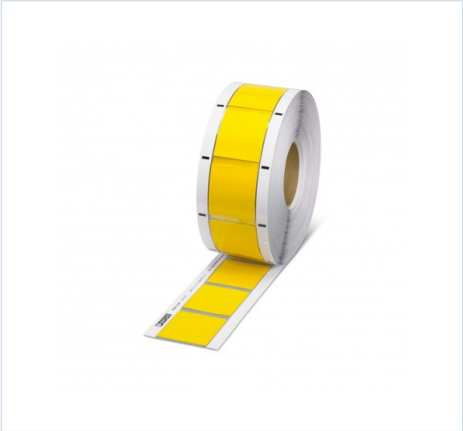

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | WMS-2 HF 38,1 (60X60)RL YE |
| Catalog number | 0833207 |
| Category | Cable coding system |
| Minimum order | 1 Pcs |
| Document ID | EO-149574E24D |
| Generated | 2026-11-19 |

## Product Overview

Shrink sleeve
Heat-shrink tubing, Roll, yellow, unlabeled, labelable with: THERMOMARKE.300 (D)/600 (D), THERMOMARK ROLLMASTER 300/600, THERMOMARK ROLL X1, THERMOMARK ROLL, THERMOMARK ROLL 2.0, THERMOMARK W, THERMOMARK X1.2, undrilled, mounting class: slip, cable diameter range: 19.1 ... 38.1 mm, usable area: 60x60mm, Number of individual indexes: 375
Shrink sleeve, Roll, yellow, white, can be labelled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLLMASTER 300/600, THERMOMARK ROLL X1, THERMOMARK ROLL, THERMOMARK ROLL 2.0, THERMOMARK W, THERMOMARK X1.2, non-perforated, mounting type: threaded, cable diameter: 19.1 ... 38.1 mm, Number of individual tags: 375, Height of the text field: 60 mm, Width of the text field: 60 mm

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > MS Material |

## Additional Product Information

Key Commercial Data
Orderkey 0833207
Packing unit 1 pc
Note Made to Order (non-returnable)
Catalog page Page 229 (C-3-2017)
GTIN 4055626044545
Weight per Piece (excluding packing) 2,562.300 g

Custom tariff number 39173200
Country of origin DK (Denmark)
Dimensions
Length (b) 60 mm
Width (a) 60 mm
Cable diameter 19.1 mm ... 38.1 mm
Ambient conditions
Ambient temperature (operation) -30 °C ... 105 °C
Recommended storage conditions 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.
General
Color yellow
Base element material polyolefine
Type Shrink sleeve
Material Polyolefine
RoHS compliant Yes
Wipe resistance DIN EN 61010-1 (VDE 0411-1)
Printing without print
Number of individual labels 300
Number of individual labels per row 1
Printability Thermal transfer
Device 5146477 THERMOMARK ROLL
5146723 THERMOMARK ROLL X1
5146231 THERMOMARK X1.2
5146147 THERMOMARK W2
0804501 THERMOMARK ROLLMASTER 300
Ink ribbon 5148007 THERMOMARK-RIBBON 110-WMTB HF
0801358 THERMOMARK-RIBBON 110-WMSU
0801360 THERMOMARK-RIBBON 64-WMSU
0803390 THERMOMARK-RIBBON 25-WMSU
Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02
Result Test passed
Test specification weathering-resistance Following ISO 4892-2:2013-03
Test duration 96 h
Wipe resistance test result Test passed
Salt spray test specification DIN EN 60068-2-11:2000-02
Test duration 96 h
Salt spray testing result Test passed
Wipe resistance of test specification insc...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / WMS-2 HF 38,1 (60X60)RL YE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.