
INDUSTRIAL COMPONENT DATA

SK 5/3,8: L1-N,PE 0804206 PHOENIX CONTACT Marker card

Brand: PHOENIX CONTACT | Manufacturer Part Number: SK 5/3,8: L1-N,PE

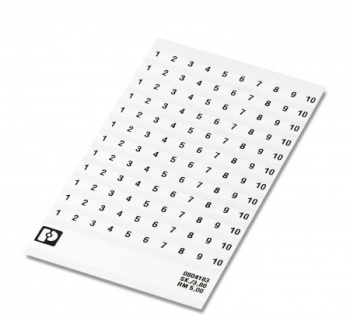

Manufacturer	PHOENIX CONTACT
MPN / Reference	SK 5/3,8: L1-N,PE
Catalog number	0804206
Category	Labelling for terminal block
Minimum order	10 Pcs
Document ID	EO-900226EE64
Generated	2026-11-19

Product Overview

Marker card
Strip card, Elbow, white, labeled, longitudinal: L1, L2, L3, N, PE, mounting class: glued, for terminal width: 5 mm, Number of individual indexes: 12
Marker card, Sheet, white, labeled, horizontal: L1, L2, L3, N, PE, mounting type: adhesive, for terminal block width: 5 mm, Number of individual labels: 12, text field height: 3.8 mm, text field width: 5 mm

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > MS Material

Additional Product Information

Technical dataProduct propertiesProduct type Labeled terminal marker
Pitch 5 mm
Type adhesive
Data management status
Article revision 01
Marking
Number of individual labels 12
Number of marker strips 12
Printing direction horizontal
Printing L1, L2, L3, N, PE
MountingMounting type adhesive
Material specificationsFoil strength 53 µm

Adhesive strength 20 µm
Adhesive Acrylic
Color white
Material Polyester
Components free from silicone and halogen
Environmental and real-life conditionsTest for substances that would hinder coating with paint or varnish
Result Test passed
UV resistance
Specification ISO 4892-2:2013-03 (following)
Result Test passed
Test duration 96 h
Wipe resistance of inscriptions
Specification DIN EN 61010-1 (VDE 0411-1):2011-07
DIN EN 62208 (VDE 0660-511):2012-06 (in parts)
Isopropyl
[CAS No. 67-63-0] Test passed
n-Hexane
[CAS No. 110-54-3] Test passed
Water + Petroleum ether
[CAS No. 64742-82-1] Test passed
Testing in a condensation changing climate in the presence of sulfur dioxide
Specification DIN 50018:2013-05
Result Test passed
Climate level AHT 1.0 S
Cycles 2
Salt spray test
Specification DIN EN 60068-2-11:2000-02
Result Test passed
Ambient conditions
Ambient temperature (operation) -40 °C ... 150 °C
Ambient temperature (assembly) > 15 °C
Recommended storage conditions 23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing.
Recommended ambient temperature (storage/transport) 23 °C
Recommended humidity (storage...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SK 5/3,8: L1-N,PE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.