
INDUSTRIAL COMPONENT DATA

UT 4-QUATTRO/ 2P BU 3060306 PHOENIX CONTACT Feed-through terminal block

Brand: PHOENIX CONTACT | Manufacturer Part Number: UT 4-QUATTRO/ 2P BU

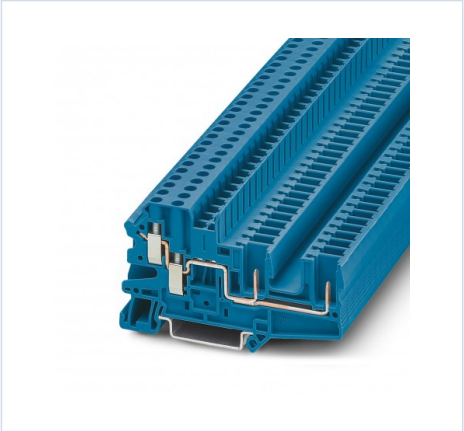

Manufacturer	PHOENIX CONTACT
MPN / Reference	UT 4-QUATTRO/ 2P BU
Catalog number	3060306
Category	Feed-through terminal block
Minimum order	50 Pcs
Document ID	EO-975DA3559D
Generated	2026-11-18

Product Overview

Feed-through terminal block
Feed-through terminal, nominal voltage: 500 V, nominal current: 32 A, number of connections: 4, connection type: Screw connection / plug-in connection, Dimensioning cross-section: 4 mm², cross-section: 0.14 mm² - 6 mm², installation class: NS 35/7.5, NS 35/15, colour: blue
Feed-through terminal block, nom. voltage: 500 V, nominal current: 32 A, number of connections: 4, connection method: Screw/plug-in connection, Rated cross section: 4 mm2, cross section: 0.14 mm2 - 6 mm2, mounting type: NS 35/7,5, NS 35/15, color: blue

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs

Additional Product Information

Technical dataNotesGeneral The max. load current must not be exceeded by the total current of all connected conductors. Current and voltage are determined by the plug used.
Product propertiesProduct type Plug-in terminal block
Number of connections 4
Number of rows 1
Potentials 1
Data management status
Article revision 06
Insulation characteristics

Overvoltage category III
Degree of pollution 3
Electrical propertiesRated surge voltage 6 kV
Maximum power dissipation for nominal condition 1.02 W
Connection dataNumber of connections per level 4
Nominal cross section 4 mm²
Level 1 below 1+2
Screw thread M3
Tightening torque 0.6 ... 0.8 Nm
Stripping length 9 mm
Internal cylindrical gage A4
Connection in acc. with standard IEC 61984
Conductor cross section rigid 0.14 mm² ... 6 mm²
Cross section AWG 26 ... 10 (converted acc. to IEC)
Conductor cross section flexible 0.14 mm² ... 6 mm²
Conductor cross section, flexible [AWG] 26 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve) 0.14 mm² ... 4 mm²
Flexible conductor cross section (ferrule with plastic sleeve) 0.14 mm² ... 4 mm²
2 conductors with same cross section, solid 0.14 mm² ... 1.5 mm²
2 conductors with same cross section, flexible 0.14 mm² ... 1.5 mm²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve 0.14 mm² ... 1.5 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve 0.5 mm² ... 1 mm²
Nominal current 32 A
M...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UT 4-QUATTRO/ 2P BU with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.