
INDUSTRIAL COMPONENT DATA

UM-DELTAV/A/T/SI/BFI 5603254 PHOENIX CONTACT Passive module

Brand: PHOENIX CONTACT | Manufacturer Part Number: UM-DELTAV/A/T/SI/BFI

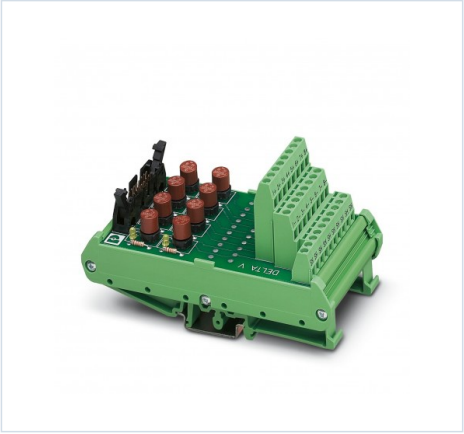

Manufacturer	PHOENIX CONTACT
MPN / Reference	UM-DELTAV/A/T/SI/BFI
Catalog number	5603254
Category	Interface module
Minimum order	1 Pcs
Document ID	EO-7294AAB687
Generated	2026-11-18

Product Overview

Passive module
VARIOFACE interconnect module with blade interrupt, fuse and fuse failure indication

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > INTERFACE Components (IF)

Additional Product Information

Key Commercial Data
Orderkey 5603254
Packing unit 1 pc
Note Made to Order (non-returnable)
GTIN 4017918923075
Weight per Piece (excluding packing) 250.000 g
Custom tariff number 85369010
Country of origin US (United States)
Dimensions
Width 61 mm
Height 126 mm
Depth 71 mm
Ambient conditions
Ambient temperature (operation) -20 °C ... 50 °C

Ambient temperature (storage/transport) -20 °C ... 70 °C
General
Max. perm. operating voltage 24 V DC
Max. perm. current (per branch) 50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted)
Number of positions 16
Mounting position any
Connection data for connection 1
Connection name Field level
Connection method Screw connection
Stripping length 7 mm
Conductor cross section solid 0.2 mm² ... 4 mm²
Conductor cross section flexible 0.2 mm² ... 2.5 mm²
Conductor cross section AWG 24 ... 12
Connection data for connection 2
Connection name Controller level
Connection method IDC/FLK pin strip
Number of connections 1
Number of positions 16
Pitch 2.54 mm
Supported controller
Controller Emerson DeltaV
- suitable I/O card VE4003S2B4
VE4005S2B3
VE4003S3B5
Standards and Regulations
Connection in acc. with standard CUL
Standards/regulations IEC 60664
IEC 60664A
DIN VDE 0110
DIN VDE 0160 (in parts)
Environmental Product Compliance
REACh SVHC Lead 7439-92-1
China RoHS Environmentally Friendly Use Period = 50
For details about hazardous substances go to tab “Downloads”, Category “Manufacturer's declaration”
Classifications
eCl@ss 4.027250313...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UM-DELTAV/A/T/SI/BFI with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.