
INDUSTRIAL COMPONENT DATA

# UTTB 2,5 WH 3044638 PHOENIX CONTACT Double-level terminal block

**Brand: PHOENIX CONTACT | Manufacturer Part Number: UTTB 2,5 WH**

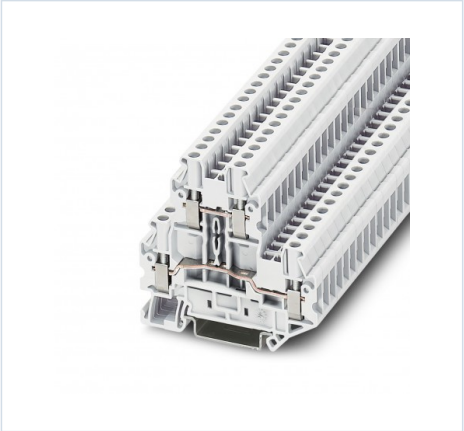

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | UTTB 2,5 WH |
| Catalog number | 3044638 |
| Category | Feed-through terminal block |
| Minimum order | 50 Pcs |
| Document ID | EO-CD55946C7C |
| Generated | 2026-11-19 |

## Product Overview

Double-level terminal block
Double-level terminal block, nominal voltage: 500 V, nominal current: 24 A, connection type: Screw connection, Sizing cross-section: 2.5 mm², cross-section: 0.14 mm² - 4 mm², installation type: NS 35/7.5, NS 35/15, color: white

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > Modular TBs |

## Additional Product Information

Key Commercial Data
Orderkey 3044638
Packing unit 50 pc
Minimum order quantity 50 pc
Note Made to Order (non-returnable)
GTIN 4055626314600
Weight per Piece (excluding packing) 15.730 g
Custom tariff number 85369010
Country of origin DE (Germany)
General
Number of levels 2
Number of connections 4
Nominal cross section 2.5 mm²

Color white
Insulating material PA
Flammability rating according to UL 94 V0
Area of application Railway industry
Machine building
Plant engineering
Process industry
Rated surge voltage 6 kV
Degree of pollution 3
Overvoltage category III
Insulating material group I
Maximum power dissipation for nominal condition 0.77 W (the value is multiplied when connecting multiple levels)
Connection in acc. with standard IEC 60947-7-1
Nominal current IN 24 A
Maximum load current 28 A (in case of a 4 mm² conductor cross section, the maximum load current must not be exceeded by the total current of all connected conductors.)
Nominal voltage UN 500 V
Open side panel Yes
Dimensions
Width 5.2 mm
Length 69.9 mm
Height NS 35/7,5 65 mm
Height NS 35/15 72.5 mm
Connection data
Connection method Screw connection
Conductor cross section solid min. 0.14 mm²
Conductor cross section solid max. 4 mm²
Conductor cross section flexible min. 0.14 mm²
Conductor cross section flexible max. 4 mm²
Conductor cross section AWG min. 26
Conductor cross section AWG max. 12
Conductor cross section flexible, with ferrule without plastic sleeve min. 0.14 mm²
Conductor cross section flexible, with....

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UTTB 2,5 WH with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.