
INDUSTRIAL COMPONENT DATA

# PML-W100 (25X25)R 0830429 PHOENIX CONTACT Warning label

**Brand: PHOENIX CONTACT | Manufacturer Part Number: PML-W100 (25X25)R**

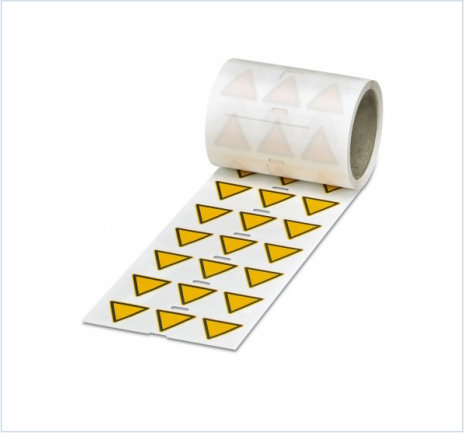

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | PML-W100 (25X25)R |
| Catalog number | 0830429 |
| Category | Warning/signing plate |
| Minimum order | 1 Pcs |
| Document ID | EO-0FFA7A1054 |
| Generated | 2026-11-18 |

## Product Overview

Warning label
Warning plate, Roll, yellow/black, unlabeled, labelable with: THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, THERMOMARK ROLL X1, THERMOMARK ROLL 2.0, THERMOMARK ROLL, mounting class: glued, diameter: 0 mm, useful surface: 25 x 25 mm, Number of individual indexes: 500
Warning label, Roll, yellow/black, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, diameter: 0 mm, Number of individual labels: 500, text field height: 25 mm, text field width: 25 mm

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > MS Material |

## Additional Product Information

Technical dataProduct propertiesProduct type Warning label unprinted
Area of application Warning identification according to ISO 7010
Type Triangle
Data management status
Article revision 04
Marking
Number of individual labels 500
Number of individual labels per row 3

Identification technology Thermal transfer for rolls
DimensionsWidth 25 mm
Text field width 25.00 mm
Height 21.65 mm
Text field height 25.00 mm
Length 25 mm
Diameter 0.00 mm
Material specificationsColor yellow/black
Material PVC
Components Silicone-free
Environmental and real-life conditionsTest for substances that would hinder coating with paint or varnish
Result Test passed
Test for substances that would hinder coating with paint or varnish
Result Test passed
Scratch test for the determining scratch resistance
Specification DIN EN ISO 1518-1:2019-10 (following)
Requirements >= 5 N
Result Test passed
Tesafilm test
Specification DIN EN ISO 2409:2013 (following)
Result Test passed
UV resistance
Specification DIN EN ISO 4892-2:2021-11 (following)
Result Test passed
Test duration 96 h
Specification IEC 60068-2-2:2007-07
Result Test passed
Duration 96 h
Temperature for testing 87 °C
Temperature resistance
Specification ANSI/UL 969-2018:03 (following)
Test duration 240 h
Rating 100 °C (121 °C) Test passed
Wipe resistance of inscriptions
Specification DIN EN 61010-1 (VDE 0411-01):2020-03
DIN EN 62208 (VDE 0660-511):2012-06 (in parts)
Isopropyl
[CAS No. 67-63-0] Test passed
n-Hexane
[CAS No. 110-54-3] Test passed
Water...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / PML-W100 (25X25)R with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.