
INDUSTRIAL COMPONENT DATA

WMS-2 HF 12,7 (60X20)RL YE CUS 0833235 PHOENIX CONTACT Shrink sleeve

Brand: PHOENIX CONTACT | Manufacturer Part Number: WMS-2 HF 12,7 (60X20)RL YE CUS

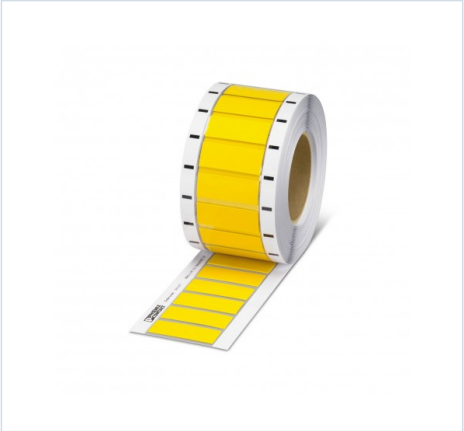

Manufacturer	PHOENIX CONTACT
MPN / Reference	WMS-2 HF 12,7 (60X20)RL YE CUS
Catalog number	0833235
Category	Cable coding system
Minimum order	1 Pcs
Document ID	EO-DC9FC1C9B7
Generated	2026-11-18

Product Overview

Shrink sleeve
Heat Shrink Casing, Yellow: Customized, Cut, Mounting Class: Slip, Cable Diameter Range: 6.4 ... 12.7 mm, usable area: 60 x 20 mm
Heat Shrink Sleeve, Yellow: Customized, Cut, Mounting Class: Slip, Cable Diameter Range: 6.4 ... 12.7 mm

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > CABINET add-on

Additional Product Information

Key Commercial Data
Orderkey 0833235
Packing unit 1 pc
Note Made to Order (non-returnable)
GTIN 4055626045023
Weight per Piece (excluding packing) 4.500 g
Custom tariff number 49119900
Country of origin DK (Denmark)
Dimensions
Length (b) 60 mm
Width (a) 20 mm
Cable diameter 6.4 mm ... 12.7 mm

Ambient conditions
Recommended storage conditions 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.
General
Color white
Base element material polyolefine
Type Shrink sleeve
Components halogen-free
Material Polyolefine
RoHS compliant Yes
Wipe resistance DIN EN 61010-1 (VDE 0411-1)
Printing user-defined
Printability Thermal transfer
Device 5146477 THERMOMARK ROLL
5146723 THERMOMARK ROLL X1
5146231 THERMOMARK X1.2
5146147 THERMOMARK W2
0804501 THERMOMARK ROLLMASTER 300
Ink ribbon 5148007 THERMOMARK-RIBBON 110-WMTB HF
0801358 THERMOMARK-RIBBON 110-WMSU
0801360 THERMOMARK-RIBBON 64-WMSU
0803390 THERMOMARK-RIBBON 25-WMSU
Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02
Result Test passed
Test specification weathering-resistance Following ISO 4892-2:2013-03
Test duration 96 h
Wipe resistance test result Test passed
Salt spray test specification DIN EN 60068-2-11:2000-02
Test duration 96 h
Salt spray testing result Test passed
Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07
Result Test passed
Marking mounting type slide on
Oxygen index (DIN EN ISO 4589-2) 34.9 %
R...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / WMS-2 HF 12,7 (60X20)RL YE CUS with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES
Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.