
INDUSTRIAL COMPONENT DATA

WMS-2 HF 19,1 (30X30) RL YE 1086851 PHOENIX CONTACT Shrink sleeve, roll, yellow, unmarked, 2:1 shrink ratio,..

Brand: PHOENIX CONTACT | Manufacturer Part Number: WMS-2 HF 19,1 (30X30) RL YE

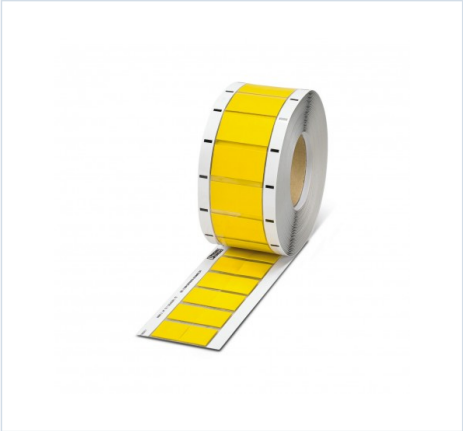

Manufacturer	PHOENIX CONTACT
MPN / Reference	WMS-2 HF 19,1 (30X30) RL YE
Catalog number	1086851
Category	Cable coding system
Minimum order	5 Pcs
Document ID	EO-1887F9E818
Generated	2026-11-19

Product Overview

Shrink sleeve, roll, yellow, unmarked, 2:1 shrink ratio, can be marked with: THERMOMARK ROLL, THERMOMARK X.1, perforated, mounting type: slid on
Heat shrink tubing, Roll, yellow, unlabeled, labelable with: THERMOMARKE.300 (D)/600 (D), THERMOMARK ROLLMASTER 300/600, THERMOMARK ROLL X1, THERMOMARK ROLL, THERMOMARK ROLL 2.0, THERMOMARK W, THERMOMARK X1.2: without printing, Perforated, mounting class: slip, cable diameter range: 9.5 ... 19.1 mm, usable area: 30x30mm, number of individual indexes: 1000

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > MS Material

Additional Product Information

Key Commercial Data
Orderkey 1086851
Packing unit 1
GTIN 4055626881058
Custom tariff number 39173200
Dimensions
General
Classifications
Ambient conditions
Standards and Regulations

Dimensions
Length (b) 30 mm
Width (a) 30 mm
Cable diameter 19.1 mm
Back to topAmbient conditions
Ambient temperature (operation) -30 °C ... 105 °C
Recommended storage conditions 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended.
Back to topGeneral
Color yellow
Base element material polyolefine
Type Shrink sleeve
Components halogen-free
Material Polyolefine
RoHS compliant Yes
Wipe resistance DIN EN 61010-1 (VDE 0411-1)
Printing without print
Printability Thermal transfer
Device 1085260 THERMOMARK ROLL 2.0
5146147 THERMOMARK W2
0804501 THERMOMARK ROLLMASTER 300
0804663 THERMOMARK ROLLMASTER 600
Ink ribbon 5148007 THERMOMARK-RIBBON 110-WMTB HF
0801358 THERMOMARK-RIBBON 110-WMSU
0801360 THERMOMARK-RIBBON 64-WMSU
0803390 THERMOMARK-RIBBON 25-WMSU
Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02
Result Test passed
Test specification weathering-resistance Following ISO 4892-2:2013-03
Procedure
Test duration 96 h
Result of weather resistance test Test passed
Salt spray test specification DIN EN 60068-2-11:2000-02
Procedure A
Test duration 96 h
Salt spray testing result Test passed
Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07
Result of wipe resistance test Test passed
Marki...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / WMS-2 HF 19,1 (30X30) RL YE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.