
INDUSTRIAL COMPONENT DATA

# WMS-2 HF 2,4 (30X4)RL YE CUS 0833211 PHOENIX CONTACT Shrink sleeve

**Brand: PHOENIX CONTACT | Manufacturer Part Number: WMS-2 HF 2,4 (30X4)RL YE CUS**

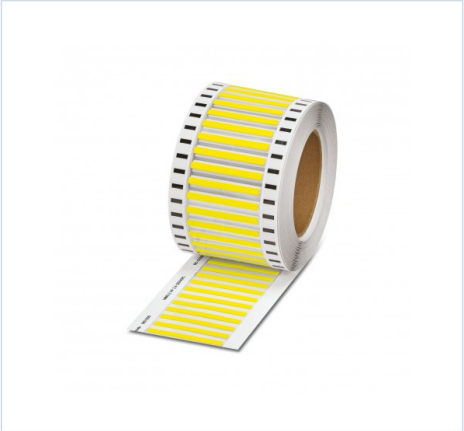

| | |
|---|---|
| Manufacturer | PHOENIX CONTACT |
| MPN / Reference | WMS-2 HF 2,4 (30X4)RL YE CUS |
| Catalog number | 0833211 |
| Category | Cable coding system |
| Minimum order | 1 Pcs |
| Document ID | EO-17F2070C0C |
| Generated | 2026-11-18 |

## Product Overview

Shrink sleeve
Heat shrink tubing, Roll, yellow: custom, cut, mounting class: slip, cable diameter range: 1.2 ... 2.4 mm, usable surface: 30 x 4 mm
Shrink sleeve, Roll, yellow: user-defined, Cut, mounting type: slide-on, cable diameter range: 1.2 ... 2.4 mm

STRUCTURED PRODUCT DATA

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

| | |
|---|---|
| Catalog path | PHOENIX CONTACT > CABINET add-on |

## Additional Product Information

Technical dataProduct propertiesProduct type Shrink sleeve printed
Area of application Railway industry
Type Shrink sleeve
Data management status
Article revision 01
Marking
Printing user-defined
Identification technology Thermal transfer for rolls
DimensionsWidth 4 mm
Length 30 mm
External dimensions
Outside diameter 1.2 mm ... 2.4 mm

Material specificationsColor yellow (RAL 1018)
Material Polyolefine
Base element material polyolefine
Shrink rate 2:1
Fire protection for rail vehicles (DIN EN 45545-2) R22 HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23 HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24 HL 1 - HL 3
Components halogen-free
Shrink temperature > 90 °C
Cable/lineExternal cable diameter 1.2 mm ... 2.4 mm
Environmental and real-life conditionsTest for substances that would hinder coating with paint or varnish
Result Test passed
Test for substances that would hinder coating with paint or varnish
Result Test passed
Scratch test for the determining scratch resistance
Specification EN ISO 1518-1:2023 (following)
Requirements >= 5 N
Result Test passed
Tesafilm test
Specification DIN EN ISO 2409:2020-12 (following)
Result Test passed
UV resistance
Specification DIN EN ISO 4892-2:2021-11 (following)
Result Test passed
Test duration 96 h
Temperature resistance
Specification ANSI/UL 969-2018:03 (following)
Test duration 240 h
Rating 100 °C (121 °C) Test passed
Wipe resistance of inscriptions
Specification DIN EN 61010-1 (VDE 0411-01):2020-0...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / WMS-2 HF 2,4 (30X4)RL YE CUS with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

**GLOBAL OFFICES**

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.