


**INDUSTRIAL COMPONENT DATA**

# SF-SL 0,8X4,0-100 S-VDE 1212588 PHOENIX CONTACT Screwdriver

Brand: PHOENIX CONTACT | Manufacturer Part Number: SF-SL 0,8X4,0-100 S-VDE

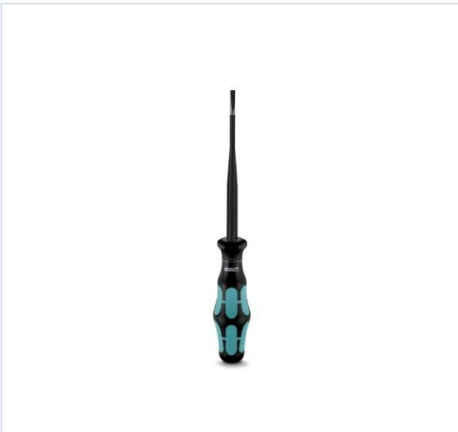

|                 |                                  |
|-----------------|----------------------------------|
| Manufacturer    | PHOENIX CONTACT                  |
| MPN / Reference | SF-SL 0,8X4,0-100 S-VDE          |
| Catalog number  | 1212588                          |
| Category        | Screwdriver for slot head screws |
| Minimum order   | 10 Pcs                           |
| Document ID     | EO-E270A559EF                    |
| Generated       | 2026-08-01                       |

## Product Overview

### Screwdriver

Reduced screwdriver, for ST terminals, VDE insulation, with thin insulation integrated into the rod, also as a slotted screw screwdriver, size: 0.8x4.0x100 mm, 2-component handle, with anti-unwind protection

**STRUCTURED PRODUCT DATA**

## Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

## Classification & Catalog Path

|              |                            |
|--------------|----------------------------|
| Catalog path | PHOENIX CONTACT > TOOL fox |
|--------------|----------------------------|

## Additional Product Information

### Key Commercial Data

Orderkey 1212588

Packing unit 10 pc

Catalog page Page 446 (C-3-2017)

GTIN 4046356590235

Weight per Piece (excluding packing) 55.750 g

Custom tariff number 82054000

Country of origin CZ (Czech Republic)

### Dimensions

Length (b) 198 mm

Width (a) 33 mm

Blade thickness 0.8 mm

Blade width 4 mm

Blade height 100 mm

Wrench size 0 mm

General

Type Bladed

straight

Material alloyed tool steel

Test standard DIN/ISO 2380-1 IEC 60900:2004

Standards and Regulations

Test standard DIN/ISO 2380-1 IEC 60900:2004

Environmental Product Compliance

California Proposition 65 Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration

Classifications

eCl@ss 10.0.121040407eCl@ss 4.021040402eCl@ss 4.121040402eCl@ss 5.021040402eCl@ss 5.121040400eCl@ss 6.021040400eCl@ss 7.021040407eCl@ss 8.021040407eCl@ss 9.021040407

ETIM 4.0EC000158ETIM 5.0EC000158ETIM 6.0EC000158

UNSPSC 6.0127111701UNSPSC 7.090127111701UNSPSC 1127111701UNSPSC 12.0127111701UNSPSC 13.227111701

ETIM for 1212588 Hand tools (EC000158)

Feature Name

Feature Value

Blade width (EF001810)

4 mm

Blade thickness (EF001811)

0.8 mm

Blade length (EF001796)

100 mm

Blade diameter (EF008945)

4 mm

Total length (EF000369)

198 mm

Precision model (EF006118)

No

Insulated (EF000019)

Yes

Isolation protection 1000 V (EF001463)

Yes

Material handle (EF006500)

Other

Grip design (EF007841)

2-components

Wrench width (hexagon drive) (EF008946)

0 mm

Low spark model (EF006299)

No

Antimagnetic (EF001031)....

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SF-SL 0,8X4,0-100 S-VDE with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.