


INDUSTRIAL COMPONENT DATA

AZK 35 0702997 PHOENIX CONTACT Branch terminal, Connection method Screw connection, Load current : 125 A, Cr..

Brand: PHOENIX CONTACT | Manufacturer Part Number: AZK 35

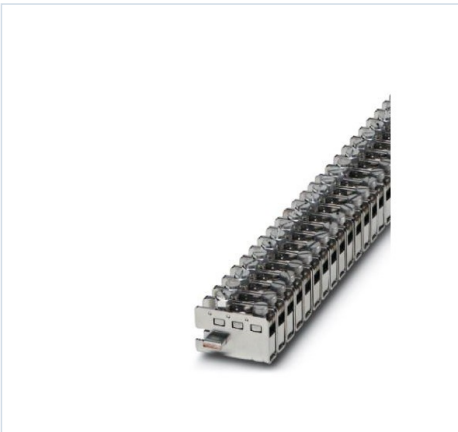

Manufacturer	PHOENIX CONTACT
MPN / Reference	AZK 35
Catalog number	0702997
Category	Busbar terminal
Minimum order	10 Pcs
Document ID	EO-ABA1CC37E3
Generated	2026-08-02

Product Overview

Branch terminal, Connection method Screw connection, Load current : 125 A, Cross section: 0.75 mm² - 35 mm², Width: 12 mm, Color: aluminum

Branch module, rated current: 125 A, connection type: Screw connection, Sizing cross-section: 35 mm², cross-section: 0.75 mm² - 35 mm², mounting: Neutral busbar, color: aluminum color

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > CABINET add-on
--------------	----------------------------------

Additional Product Information

General

Color aluminiumfarben

Nominal cross section 35 mm²

General

Maximum load current 125 A (with 35 mm² conductor cross section)

Nominal current IN 125 A

Maximum load current 125 A (with 35 mm² conductor cross section)

Dimensions

Length 40 mm

Width 12 mm

Connection data

Conductor cross section solid min. 0.75 mm²

Conductor cross section solid max. 35 mm²

Conductor cross section flexible min. 0.75 mm²

Conductor cross section flexible max. 35 mm²

Conductor cross section AWG min. 18

Conductor cross section AWG max. 2

Conductor cross section flexible, with ferrule without plastic sleeve min. 0.75 mm²

Conductor cross section flexible, with ferrule without plastic sleeve max. 35 mm²

Conductor cross section flexible, with ferrule with plastic sleeve min. 0.75 mm²

Conductor cross section flexible, with ferrule with plastic sleeve max. 35 mm²

2 conductors with same cross section, solid min. 0.75 mm²

2 conductors with same cross section, solid max. 10 mm²

2 conductors with same cross section, stranded min. 0.75 mm²

2 conductors with same cross section, stranded max. 10 mm²

2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. 0.75 mm²

2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. 10 mm²

2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. 0.75 mm²

2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. 10 mm²

Connection method Screw connection

S...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / AZK 35 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.