


INDUSTRIAL COMPONENT DATA

TOOL-BAG 1212504 PHOENIX CONTACT Tool bag, equipped

Brand: PHOENIX CONTACT | Manufacturer Part Number: TOOL-BAG

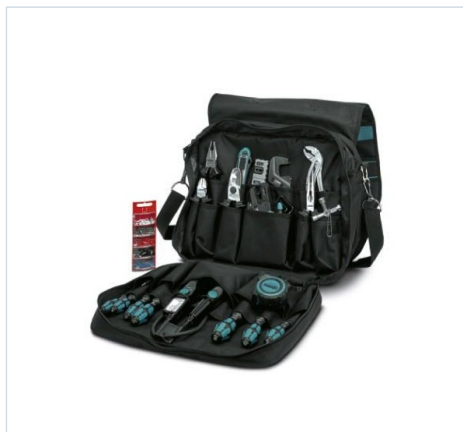

Manufacturer	PHOENIX CONTACT
MPN / Reference	TOOL-BAG
Catalog number	1212504
Category	Tool set
Minimum order	1 Pcs
Document ID	EO-3DFA37A482
Generated	2026-08-02

Product Overview

Tool bag, equipped

Tool case with laptop and document compartment, equipped with: cable cutter, side cutting pliers, wire stripper, de-insulating tool, crimping tool set, parrot beak pliers, universal and tip pliers, flat VDE screwdriver: 0.4 x 2.5/0.5 x 3.0/1.0 x 4.0/1.0 x 5.5 star: PHO/PH1/PH2 control cabinet key, Tension Tester, Dropout Box, Gauge, Metric Belt, Tool Case

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > TOOL fox
--------------	----------------------------

Additional Product Information

Key Commercial Data

Orderkey 1212504

Packing unit 1 pc

Catalog page Page 467 (C-3-2017)

GTIN 4046356528405

Weight per Piece (excluding packing) 7,600.000 g

Custom tariff number 82060000

Country of origin DE (Germany)

Dimensions

Length (b) 410 mm

Width (a) 225 mm

Depth 225 mm

Height (c) 340 mm

General

Weight 1.73 kg

Environmental Product Compliance

California Proposition 65 Further information on California's prop. 65 is available under "Downloads" in the manufacturer's declaration

Articles in set

Cable cutter, precision blade with macro-notching, for copper and aluminum up to 70 mm², VDE 1000 V AC/ 1500 V DC tested

Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

Stripping tool, for cables and conductors from 0.02 - 10 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

Stripping tool, for stripping cables of 4.5 mm - 40 mm-Ø, insulation thickness of up to 4.5 mm, pivoting blade for round, lengthwise, and spiral cuts

Crimping pliers set, consisting of CRIMPFOX-M (pliers) and dies for insulated cable lugs 0.5 ... 2.5 mm² (1212074), non-insulated conduit lugs 0.5 ... 6 mm² (1212079) and ferrules 0.25 ... 10 mm² (1212080) and 16/25 mm² (1212081).

Combination pliers, notched gripping surface, VDE 1000 V AC/1500 V DC tested, size: 180 mm

Needle-nose pliers with blade, notched grip area, VDE 1000 V AC/1500 V DC tested

Water pump pliers, with groove joint, grip...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / TOOL-BAG with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.