


INDUSTRIAL COMPONENT DATA

VS-OE-OE-94B-100,0 1416567 PHOENIX CONTACT Network cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: VS-OE-OE-94B-100,0

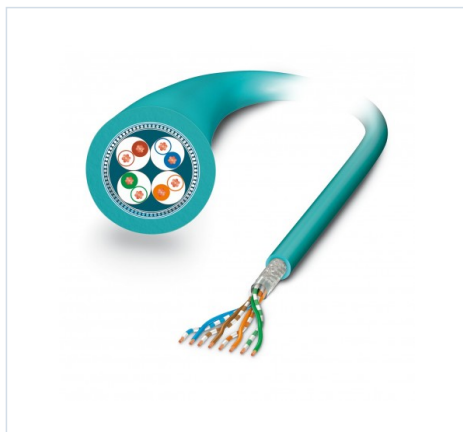

Manufacturer	PHOENIX CONTACT
MPN / Reference	VS-OE-OE-94B-100,0
Catalog number	1416567
Category	Data and communication cable
Minimum order	1 Pcs
Document ID	EO-635E6E34E4
Generated	2026-07-28

Product Overview

Network cable

Network cable, CAT5 Ethernet (1 GBit/s), 8-pole halogen-free, shielded, free cable end, to free cable end, cable length: 100 m

Data cable, CAT5 Ethernet (1 GBit/s), 8-pole, halogen-free PUR, water blue RAL 5021, shielded, free cable end, to free cable end, cable length: 100 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1416567

Packing unit 1 pc

Catalog page Page 397 (C-2-2017)

GTIN 4046356475327

Weight per Piece (excluding packing) 4,046.000 g

Custom tariff number 85444995

Country of origin DE (Germany)

Dimensions

Length of cable 100 m

General data

Number of positions 8
Signal type/category Ethernet CAT5 (IEC 11801:2002), 1 Gbps
Cable
Cable type Ethernet, flexible, CAT5
Cable type (abbreviation) 94B
UL AWM style 20963 (80°C/30 V)
Signal type/category Ethernet CAT5 (IEC 11801), 1 Gbps
Cable structure 4x2xAWG26/7; SF/UTP
Conductor cross section 4x 2x 0.14 mm²
AWG signal line 26
Conductor structure signal line 7x 0.16 mm
Core diameter including insulation 0.96 mm
Wire colors white/blue-blue, white/orange-orange, white/green-green, white/brown-brown
Twisted pairs 2 cores to the pair
Overall twist 4 pairs for core
Shielding Aluminum-coated foil, tinned copper braided shield
Optical shield covering 70 %
External sheath, color water blue RAL 5021
Outer sheath thickness 1.05 mm
External cable diameter D 6.4 mm ±0.2 mm
Minimum bending radius, fixed installation 4 x D
Minimum bending radius, flexible installation 8 x D
Tensile strength GRP ≤ 100 N
Cable weight 47 kg/km
Outer sheath, material PUR
Material conductor insulation Foamed PE
Conductor material Bare Cu litz wires
Insulation resistance ≥ 500 MΩ*km
Loop resistance ≤ 290.00 Ω/km
Cable capacity 48 nF/km (at 1 kHz)
Wave impedance 100 Ω ±5 Ω (at 100 MHz)
Near end crosstalk attenuation (NEXT) 71.3 dB (with 1 MHz)
62.3....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / VS-OE-OE-94B-100,0 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.