


**INDUSTRIAL COMPONENT DATA**

# LS-WMTB-AL (D30) BK CUS 0831799 PHOENIX CONTACT

## Cable marker

Brand: PHOENIX CONTACT | Manufacturer Part Number: LS-WMTB-AL (D30) BK CUS

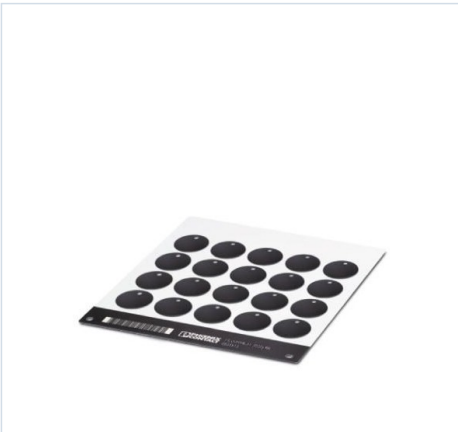

|                 |                         |
|-----------------|-------------------------|
| Manufacturer    | PHOENIX CONTACT         |
| MPN / Reference | LS-WMTB-AL (D30) BK CUS |
| Catalog number  | 0831799                 |
| Category        | Cable coding system     |
| Minimum order   | 1 Pcs                   |
| Document ID     | EO-CCD0C71386           |
| Generated       | 2026-08-05              |

### Product Overview

Cable marker

Cable marker, Aluminum plate, available: per piece, black, labeled according to customer specifications, mounting class: Mounting with cable tie, cable diameter: > 2.9 mm, useful surface: d 30 mm, Number of individual indexes: 20

**STRUCTURED PRODUCT DATA**

### Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

### Classification & Catalog Path

|              |                                  |
|--------------|----------------------------------|
| Catalog path | PHOENIX CONTACT > CABINET add-on |
|--------------|----------------------------------|

### Additional Product Information

Key Commercial Data

Orderkey 0831799

Packing unit 1 pc

Note Made to Order (non-returnable)

Catalog page Page 249 (NTK-2014)

GTIN 4046356930109

Weight per Piece (excluding packing) 99.990 g

Custom tariff number 76169990

Country of origin DE (Germany)

Dimensions

Length (b) 30 mm

Width (a) 30 mm

Material thickness (g) 0.80 mm

Ambient conditions

Ambient temperature (operation) -25 °C ... 70 °C

General

Color aluminum color

Type Card form

Components free from silicone, halogen, and cadmium

Material Aluminum

RoHS compliant Yes

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Printability Direct laser marking

Device 0831831 TOPMARK LASER

Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02

Result Test passed

Test specification weathering-resistance Following ISO 4892-2:2013-03

Procedure

Test duration 96 h

Note The information does not apply to the color fastness of the material.

Wipe resistance test result Test passed

Salt spray test specification DIN EN 60068-2-11:2000-02

Procedure A

Test duration 96 h

Note The information does not apply to the color fastness of the material.

Salt spray testing result Test passed

Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07

Result Test passed

Marking mounting type Assembly with cable binders

Standards and Regulations

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Classifications

eCl@ss 5.127400400eCl@ss 6.027400400eCl@ss 7.027400401eCl@ss 8.027400401eCl@ss 9.027400401

ETIM 4.0EC0...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / LS-WMTB-AL (D30) BK CUS with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.