


INDUSTRIAL COMPONENT DATA

SAC-17P- 1,5-PVC/FR SCO 1555389 PHOENIX CONTACT

Sensor/actuator cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-17P-1,5-PVC/FR SCO

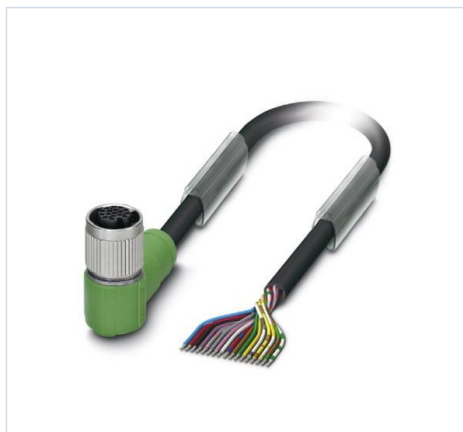

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-17P-1,5-PVC/FR SCO
Catalog number	1555389
Category	Sensor-actuator patch cord
Minimum order	1 Pcs
Document ID	EO-551A503D22
Generated	2026-08-04

Product Overview

Sensor/actuator cable

Sensor/Actuator Cable, 17-Pole, Free Cable End, to Elbowed Female M12, Coding: A SPEEDCON, Cable Length: 1.5 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1555389

Packing unit 1 pc

Catalog page Page 219 (C-2-2017)

GTIN 4046356176668

Weight per Piece (excluding packing) 110.100 g

Custom tariff number 85444290

Country of origin DE (Germany)

Dimensions

Length of cable 1.5 m

Cable diameter 6.4 mm

Stripping length of the free conductor end 35 mm

Ambient conditions

Ambient temperature (operation) -25 °C ... 90 °C (Socket)

Degree of protection IP65
IP67
IP68
General
Rated current at 40°C 1.5 A
Rated voltage 30 V AC
30 V DC
Number of positions 17
Insulation resistance $\geq 100 \text{ M}\Omega$
Coding A - standard
Standards/regulations M12 connector IEC 61076-2-101
Status display No
Protective circuit/component unwired
Overvoltage category II
Degree of pollution 3
Torque 0.4 Nm (M12 connector)
Material
Flammability rating according to UL 94 V0
Contact material CuZn
Contact surface material Ni/Au
Contact carrier material TPU GF
Material of grip body TPU, hardly inflammable, self-extinguishing
Material, knurls Zinc die-cast, nickel-plated
Sealing material NBR
Cable
Cable type PVC black
Conductor cross section 0.14 mm^2
AWG signal line 26
Conductor structure signal line $18 \times 0.10 \text{ mm}$
Core diameter including insulation $1 \text{ mm} \pm 0.05 \text{ mm}$
Wire colors Color-coded DIN 47100
Overall twist Wires twisted in layers
External sheath, color black RAL 9005
External cable diameter 6.40 mm
Smallest bending radius, movable installation 96 mm
Outer sheath, material PVC
Material conductor insulation PVC
Conductor material Bare Cu litz wires
Standards/...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-17P-1,5-PVC/FR SCO with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.