


INDUSTRIAL COMPONENT DATA

SAC-4P-20,0-PUR/M 8FS 0,34 1543618 PHOENIX CONTACT

Sensor/actuator cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-4P-20,0-PUR/M 8FS 0,34

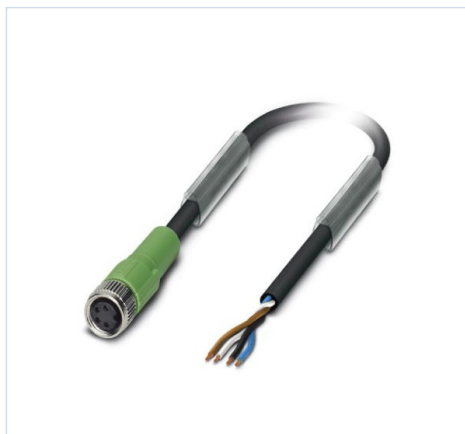

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-4P-20,0-PUR/M 8FS 0,34
Catalog number	1543618
Category	Sensor-actuator patch cord
Minimum order	1 Pcs
Document ID	EO-A1BCD982A2
Generated	2026-08-04

Product Overview

Sensor/actuator cable

Sensor/actuator cable, 4-pole, halogen-free PUR, greyish black RAL 7021, free cable end, to M8 straight connection female, cable length: 20 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1543618

Packing unit 1 pc

Note Made to Order (non-returnable)

Catalog page Page 222 (C-6-2017)

GTIN 4046356098984

Weight per Piece (excluding packing) 510.000 g

Custom tariff number 85444290

Country of origin DE (Germany)

Dimensions

Length of cable 20 m

Stripping length of the free conductor end 50 mm

Ambient conditions

Ambient temperature (operation) -25 °C ... 90 °C (Plug / socket)

Degree of protection IP65

IP67

IP68

General

Rated current at 40°C 4 A

Rated voltage 48 V AC

60 V DC

Number of positions 4

Insulation resistance $\geq 100 \text{ M}\Omega$

Coding A - standard

Status display No

Protective circuit/component unwired

Overvoltage category II

Degree of pollution 3

Test voltage 800 V

Insertion/withdrawal cycles ≥ 100

Material

Flammability rating according to UL 94 HB

Contact material CuSn

Contact surface material Ni/Au

Contact carrier material TPU GF

Material of grip body TPU, hardly inflammable, self-extinguishing

Material, knurls Zinc die-cast, nickel-plated

Sealing material NBR

Cable

Cable type PUR/PVC black

Cable abbreviation LiYY-11Y

Conductor cross section 0.34 mm^2

AWG signal line 22

Conductor structure signal line $42 \times 0.10 \text{ mm}$

Core diameter including insulation $1.5 \text{ mm} \pm 0.05 \text{ mm}$

Thickness, insulation $\geq 0.3 \text{ mm}$ (Core insulation)

$\geq 0.35 \text{ mm}$ (Inner sheath)

$\geq 0.38 \text{ mm}$ (Outer cable sheath)

Wire colors brown, white, blue, black

Overall twist 4 wires, twisted

External sheath, color black RAL 9005

External cable diameter 5.20 mm

Smallest bending radius, fixed instal...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-4P-20,0-PUR/M 8FS 0,34 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.