


INDUSTRIAL COMPONENT DATA

VS-ASI-FC-TPE-UL-BK 1000M 1434675 PHOENIX CONTACT

Flat-ribbon conductor

Brand: PHOENIX CONTACT | Manufacturer Part Number: VS-ASI-FC-TPE-UL-BK 1000M

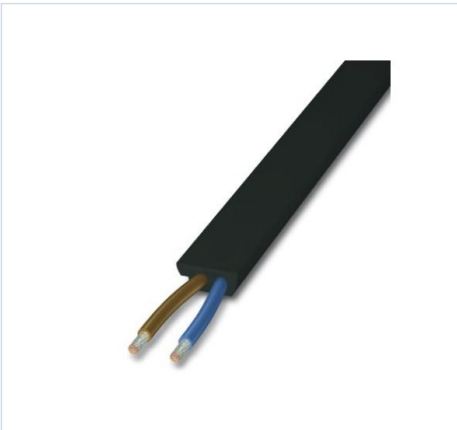

Manufacturer	PHOENIX CONTACT
MPN / Reference	VS-ASI-FC-TPE-UL-BK 1000M
Catalog number	1434675
Category	Data cable
Minimum order	1 Pcs
Document ID	EO-C0724369E9
Generated	2026-08-05

Product Overview

Flat-ribbon conductor

AS-Interface TPE flat cable with UL in black, for additional power supply, 2 x 1.5 mm², 1000 m disposable drum

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1434675

Packing unit 1 pc

Note Made to Order (non-returnable)

Catalog page Page 438 (C-2-2017)

GTIN 4046356349284

Weight per Piece (excluding packing) 222.220 g

Custom tariff number 85444995

Country of origin DE (Germany)

Mechanical characteristics

Number of positions 2

Shielded no

Type of cable Flat-ribbon conductor

Cable structure 2x 1.5 mm²

Duty cycle testing suitable for drag chain
Length of cable 1000 m
Ambient conditions
Ambient temperature (operation) -40 °C ... 105 °C (fixed routing)
-30 °C ... 105 °C (Flexibly installed)
Ambient temperature (assembly) -30 °C ... 105 °C
Ambient temperature (storage/transport) -40 °C ... 105 °C
Material data
Outer sheath, material TPE
External sheath, color black RAL 9005
Height 4 mm
Electrical characteristics
Rated voltage (III/3) 300 V
Rated surge voltage 2 kV
Standards and Regulations
Duty cycle testing suitable for drag chain
Line characteristics
Type of cable Flat-ribbon conductor
Cable structure 2x 1.5 mm²
Conductor cross section 1.5 mm²
AWG power supply 16
Conductor structure, voltage supply 84x 0.15 mm
Core diameter including insulation 2.5 mm
Thickness, insulation approx. 0.5 mm
Wire colors brown, blue
External sheath, color black RAL 9005
Insulation resistance $\geq 1 \text{ M}\Omega\cdot\text{km}$
Conductor resistance $\leq 13.7 \text{ }\Omega/\text{km}$
Nominal voltage, cable 300 V
Test voltage, cable 2000 V
Outer sheath, material TPE
Material conductor insulation TPE
Conductor material Bare Cu litz wires
Cable weight 64 kg/km
Smallest bending rad...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / VS-ASI-FC-TPE-UL-BK 1000M with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.