


INDUSTRIAL COMPONENT DATA

CD-HF COVER 120 3240368 PHOENIX CONTACT Cover profile

Brand: PHOENIX CONTACT | Manufacturer Part Number: CD-HF COVER 120

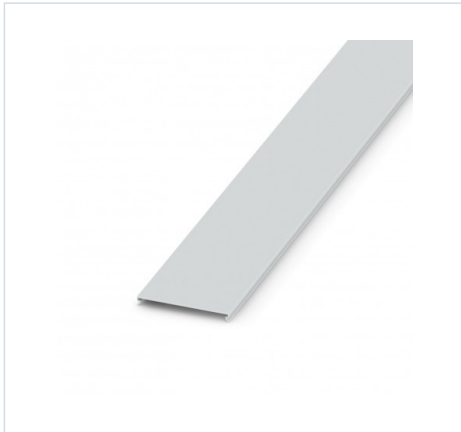

Manufacturer	PHOENIX CONTACT
MPN / Reference	CD-HF COVER 120
Catalog number	3240368
Category	Cover for slotted cable trunking system
Minimum order	10 Pcs
Document ID	EO-6BEA943527
Generated	2026-08-01

Product Overview

Cover profile

Cable channel cover, light grey, halogen-free, width: 120 mm, length: 2000 mm

Cover for cable duct, light gray, halogen-free, width: 120 mm, length: 2000 mm

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > CABINET add-on
--------------	----------------------------------

Additional Product Information

Technical dataProduct propertiesProduct type Cover

Data management status

Article revision 02

DimensionsWidth 120 mm

Height 2000 mm

Depth 11 mm

Length 2000 mm

Material specificationsColor light gray (RAL 7035)

Material PC/ABS

Flammability rating according to UL 94 V0

Components halogen-free

Environmental and real-life conditionsAmbient conditions

Ambient temperature (operation) -25 °C ... 90 °C

ETIM for 3240368 Slotted cable trunking (EC000727)

Feature Name

Feature Value

For cable duct width (EF000603)

120 mm

Length (EF001438)

2000 mm

Halogen free (EF000025)

Yes

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / CD-HF COVER 120 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.