


INDUSTRIAL COMPONENT DATA

E-WM (EX15)R YE 1233941 PHOENIX CONTACT Marking foil, Roll, yellow, unlabeled, labelable with: THERMOMARK E...

Brand: PHOENIX CONTACT | Manufacturer Part Number: E-WM (EX15)R YE

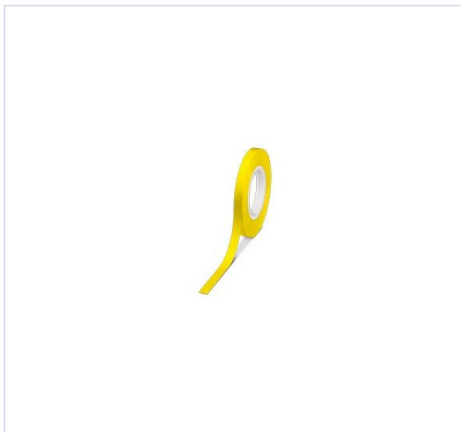

Manufacturer	PHOENIX CONTACT
MPN / Reference	E-WM (EX15)R YE
Catalog number	1233941
Category	Cable coding system
Minimum order	1 Pcs
Document ID	EO-7608A48587
Generated	2026-08-03

Product Overview

Marking foil, Roll, yellow, unlabeled, labelable with: THERMOMARK E.WIRE, cable diameter range: 1.8 ... 5.6 mm, mounting class: solder, Number of individual indexes: 1, length. Roll: 90 m, text field height: 15 mm

Marking Sheet, Roll, Yellow, Unlabeled, Labelable with: THERMOMARK E.WIRE, Mounting Class: Welding, Cable Diameter Range: 1.8 ... 5.6 mm, usable area: 3 marking fields with variable height x 14.5 mm, long. Roll: 100 m

Marking Film, Roll, Yellow, Blank, Traceable with: THERMOMARK E.WIRE, THERMOMARK E.300 (D)/600 (D), Mounting Type: Weld, Cable Diameter Range: 1.8 ... 5.6 mm, usable area: 3 usable surfaces with variable height x 14.5 mm, roll length: 90 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > MS Material
--------------	-------------------------------

Additional Product Information

Technical characteristicsProduct PropertiesProduct Type Marking of conductors

Scouting

Marking technology Heat Transfer for Rollers

Connection featuresAWG conductor section (conversion to IEC)

DimensionsWidth 14.8 mm

Roll Length 90.00 m

Material GuidanceColours yellow

Material PET + thermoplastic hot melt glue

Components Silicone and halogen-free

Cable/Conductor Outer diameter of the cable 1.8 mm ... 5.6 mm

Environmental and service life conditions Checking for materials that may affect lacquer adhesion

Control of materials that may affect the dispersion of the lacquer (LABS compliance) VW PV 3.10.7:2005-02

Result Successful test

Scratch test to determine scratch resistance

Control Specification (Based on the standard) DIN EN ISO 1518-1:2019-10

Requirement ≥ 5 N

Result Successful test

Scotch Tape Trial

Control Specification (Based on the standard) DIN EN ISO 2409:2013

Result Successful test

UV resistance

Control Specification (Based on the standard) DIN EN ISO 4892-2:2013-06

Result Successful test

Duration of the inspection 96 h

Method Artificial radiation with xenon arc lamps

Temperature storage

Control Specification DIN EN 60068-2-2 (VDE 0468-2-2):2008-05

Result Successful test

Duration 96 h

Control Temperature 80 °C

Saturated atmosphere test with sulphur dioxide atmosphere

Control Specification DIN 50018:2013-05

Result Successful test

Climatic degree AHT 1.0 S

Cycles 2

Salt spray test

Control Specification DIN EN 60068-2-11:2000-02

Result Successful test

Duration of the ins...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / E-WM (EX15)R YE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.