


INDUSTRIAL COMPONENT DATA

FLKMS-D 9 SUB/B/ZFKKDS/PE 2295949 PHOENIX CONTACT Interface module

Brand: PHOENIX CONTACT | Manufacturer Part Number: FLKMS-D 9 SUB/B/ZFKKDS/PE

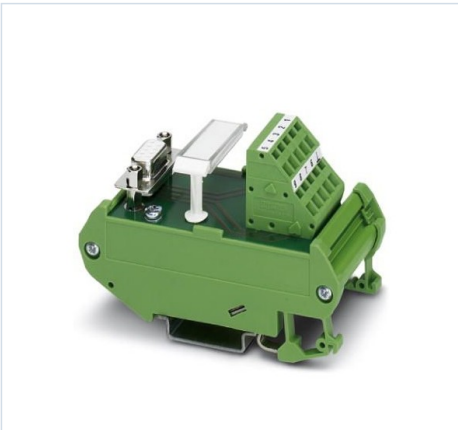

Manufacturer	PHOENIX CONTACT
MPN / Reference	FLKMS-D 9 SUB/B/ZFKKDS/PE
Catalog number	2295949
Category	Interface module
Minimum order	1 Pcs
Document ID	EO-F3B08C87F9
Generated	2026-08-02

Product Overview

Interface module

VARIOFACE module, with spring-loaded terminal connection and subminiature female connector D, for mounting on NS 35/7.5 or NS 32, number of poles 9

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > INTERFACE Components (IF)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 2295949

Packing unit 1 pc

Note Made to Order (non-returnable)

GTIN 4017918448028

Weight per Piece (excluding packing) 62.380 g

Custom tariff number 85369010

Country of origin DE (Germany)

Dimensions

Width 41 mm

Height 90 mm

Depth 62 mm

Ambient conditions

Ambient temperature (operation) -20 °C ... 50 °C

General

Max. perm. operating voltage 25 V AC (48 V DC)

Max. perm. current (per branch) 2.5 A

Number of positions 9

Status display No

Mounting position any

Degree of protection IP00

Connection data for connection 1

Connection name Field level

Connection in acc. with standard IEC / EN

Connection method Spring-cage connection

Stripping length 7 mm

Conductor cross section solid 0.2 mm² ... 2.5 mm²

Conductor cross section flexible 0.2 mm² ... 1.5 mm²

Conductor cross section AWG 24 ... 14

Number of positions 10

Connection data for connection 2

Connection name Controller level

Connection method D-SUB socket strip

Number of positions 9

Standards and Regulations

Designation Air clearances and creepage distances

Standards/regulations DIN EN 50178: 1998-04

Rated insulation voltage 125 V

Rated surge voltage 1.2 kV (1.2/50 us)

Insulation Functional insulation

Degree of pollution 2

Overvoltage category II

Environmental Product Compliance

China RoHS Environmentally Friendly Use Period = 50

For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Classifications

eCl@ss 4.027250313eCl@ss 4.127250313eCl@ss 5.027250313eCl@ss...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / FLKMS-D 9 SUB/B/ZFKKDS/PE with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.