


INDUSTRIAL COMPONENT DATA

SK 5,08/3,8: 0-9 0804303 PHOENIX CONTACT Marker for terminal blocks

Brand: PHOENIX CONTACT | Manufacturer Part Number: SK 5,08/3,8: 0-9

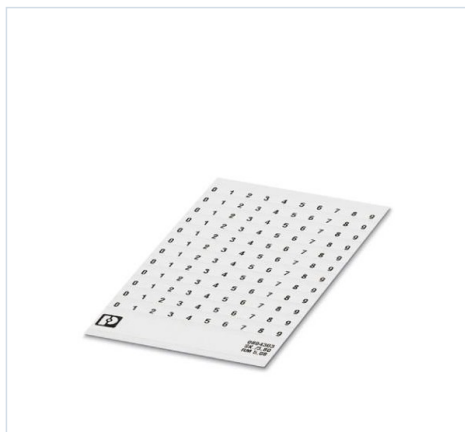

Manufacturer	PHOENIX CONTACT
MPN / Reference	SK 5,08/3,8: 0-9
Catalog number	0804303
Category	Labelling for terminal block
Minimum order	10 Pcs
Document ID	EO-532137EC4F
Generated	2026-08-01

Product Overview

Marker for terminal blocks

Striped card, Elbow, white, labeled, longitudinal: sequential numbers 0 ... 9, Mounting type: glued, for terminal width: 5.08 mm, usable area: 5.08 x 3.8 mm

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > MS Material
--------------	-------------------------------

Additional Product Information

Key Commercial Data

Orderkey 0804303

Packing unit 10 pc

Minimum order quantity 10 pc

Catalog page Page 502 (CL-2009)

GTIN 4017918124151

Weight per Piece (excluding packing) 0.720 g

Custom tariff number 49119900

Country of origin PL (Poland)

Dimensions

Width (a) 5.08 mm

Height (c) 3.8 mm

Ambient conditions

Ambient temperature (operation) -40 °C ... 150 °C

Ambient temperature (assembly) > 15 °C

Recommended storage conditions 23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing.

General

Color white

Type adhesive

Components free from silicone and halogen

Material Polyester

Wipe resistance DIN EN 61010-1 (VDE 0411-1)

Printing direction Horizontal

Printing consecutive numbers 0 ... 9

Number of marker strips 12

Adhesive Acrylic

Printability Thermal transfer

Device 5146477 THERMOMARK ROLL

5146231 THERMOMARK X1.2

Ink ribbon 5145384 THERMOMARK-RIBBON 110

Test for substances that would hinder coating with paint or varnish VW PV 3.10.7:2005-02

Result Test passed

Test specification weathering-resistance Following ISO 4892-2:2013-03

Test duration 96 h

Wipe resistance test result Test passed

Salt spray test specification DIN EN 60068-2-11:2000-02

Test duration 96 h

Salt spray testing result Test passed

Alternating condensation climate with SO2 test specification DIN 50018:2013-05

Climate level AHT 1.0 S

Cycles 2

Condensation test result Test passed

Wipe resistance of test specification inscriptions DIN EN 61010-1 (VDE 0411-1):2011-07

Result Te...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SK 5,08/3,8: 0-9 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.