


INDUSTRIAL COMPONENT DATA

SAC-4P-10,0-PVC/M 8FS BK VA 1401472 PHOENIX CONTACT

Sensor/actuator cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-4P-10,0-PVC/M 8FS BK VA

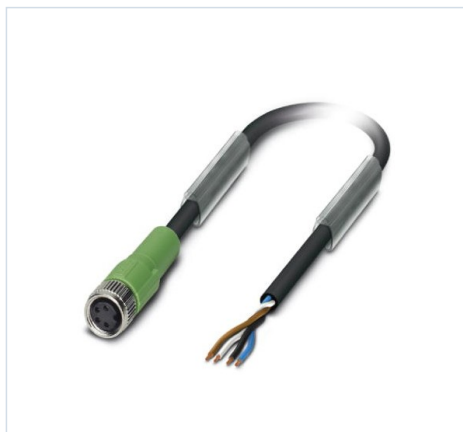

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-4P-10,0-PVC/M 8FS BK VA
Catalog number	1401472
Category	Sensor-actuator patch cord
Minimum order	50 Pcs
Document ID	EO-1D3A118E01
Generated	2026-08-05

Product Overview

Sensor/actuator cable

Sensor/actuator cable, 4-pole, PVC, black RAL 9005, free cable end, to M8 straight connection female, cable length: 10 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1401472

Packing unit 1

GTIN 4046356557337

Custom tariff number 85444290

Dimensions

Length of cable 10 m

Ambient conditions

Degree of protection IP65

IP67

IP68

IP69K

General

Rated current at 40°C 4 A

Rated voltage 48 V AC
60 V DC
Number of positions 4
Insulation resistance $\geq 100 \text{ M}\Omega$
Coding A - standard
Status display No
Overvoltage category II
Degree of pollution 3
Material
Flammability rating according to UL 94 HB
Contact material CuSn
Contact surface material Ni/Au
Contact carrier material TPU GF
Material of grip body TPU, hardly inflammable, self-extinguishing
Material, knurls Stainless steel
Sealing material NBR
Standards and Regulations
Flammability rating according to UL 94 HB
Cable
Cable type PVC black
Cable type (abbreviation) PVC
Cable abbreviation LiYY
Conductor cross section $4 \times 0.25 \text{ mm}^2$ (Signal line)
AWG signal line 24
Conductor structure signal line $14 \times 0.15 \text{ mm}$
Core diameter including insulation $1.17 \text{ mm} \pm 0.05 \text{ mm}$
Thickness, insulation $\geq 0.23 \text{ mm}$ (Core insulation)
 $\geq 0.76 \text{ mm}$ (Outer cable sheath)
Wire colors brown, white, blue, black
Overall twist 4 wires, twisted
External sheath, color black RAL 9005
External cable diameter $D 4.4 \text{ mm} \pm 0.15 \text{ mm}$
Cable weight 33 kg/km
Outer sheath, material PVC
Material conductor insulation PVC
Conductor material Bare Cu litz wires
Insulation resistance $\geq 100 \text{ M}\Omega \cdot \text{km}$ (at 20°C)
Conductor resistance max. $79 \text{ m}\Omega/\text{km}$ (at 20°C)
Nominal voltage, cable $\leq 300 \text{ V}$
Test voltage, cable $\geq 3000 \text{ V}$
Flame resistance As per UL-Style....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-4P-10,0-PVC/M 8FS BK VA with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.