


INDUSTRIAL COMPONENT DATA

UW 10/S 3073335 PHOENIX CONTACT Panel feed-through terminal block

Brand: PHOENIX CONTACT | Manufacturer Part Number: UW 10/S

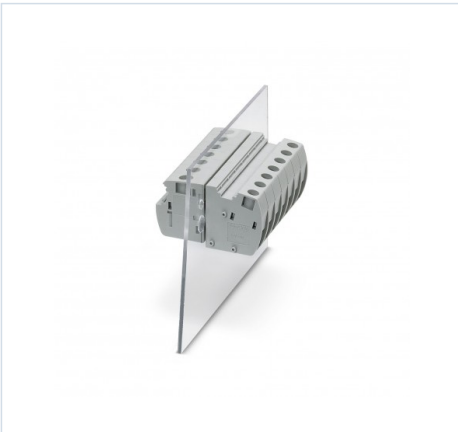

Manufacturer	PHOENIX CONTACT
MPN / Reference	UW 10/S
Catalog number	3073335
Category	Panel feed-through terminal block
Minimum order	50 Pcs
Document ID	EO-7DF52ECD CB
Generated	2026-08-02

Product Overview

Panel feed-through terminal block

Wall terminal block, connection type: Screw connection with traction capsule, Screw connection with traction capsule, number of poles: 1, charging current: 57 A, cross-section: 0.5 mm² - 16 mm², conductor connection direction with respect to the plug direction: 0 °, width: 10.1 mm

Panel feed-through terminal block, connection method: Screw connection with tension sleeve, Screw connection with tension sleeve, number of positions: 1, load current: 57 A, cross section: 0.5 mm² - 16 mm², connection direction of the conductor to plug-in direction: 0 °, width: 10.1 mm, color: gray

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)
--------------	--

Additional Product Information

Technical dataProduct propertiesProduct type Panel feed-through terminal block

Product family UW 10

Number of positions 1

Pitch 10.1 mm

Number of connections 2

Number of rows 1

Number of potentials 1

Data management status

Article revision 03

Insulation characteristics

Overvoltage category III

Degree of pollution 3

Electrical properties Nominal current I_N 57 A

Nominal voltage U_N 500 V

Rated voltage (III/3) 500 V

Rated surge voltage (III/3) 6 kV

Connection data Connection technology

Connector system UW 10

Nominal cross section 10 mm²

Conductor connection exterior

Connection method Screw connection with tension sleeve

Connection direction of the conductor to plug-in direction 0 °

Conductor cross section rigid 0.5 mm² ... 16 mm²

Conductor cross section flexible 0.5 mm² ... 10 mm²

Conductor cross section flexible, with ferrule without plastic sleeve 0.5 mm² ... 10 mm²

Conductor cross section, flexible, with ferrule, with plastic sleeve 0.5 mm² ... 10 mm²

2 conductors with same cross section, solid 0.5 mm² ... 4 mm²

2 conductors with same cross section, flexible 0.5 mm² ... 4 mm²

2 conductors with same cross section, flexible, with ferrule without plastic sleeve 0.5 mm² ... 2.5 mm²

2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve 0.5 mm² ... 6 mm²

Internal cylindrical gage B6

Stripping length 11 mm

Tightening torque 1.5 Nm ... 1.8 Nm

Conductor connection interior

Connection method Screw connection with tension sleeve

Connection direction of...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UW 10/S with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.