


**INDUSTRIAL COMPONENT DATA****ATP-UK 5-MTK 3004210 PHOENIX CONTACT Partition plate**

Brand: PHOENIX CONTACT | Manufacturer Part Number: ATP-UK 5-MTK

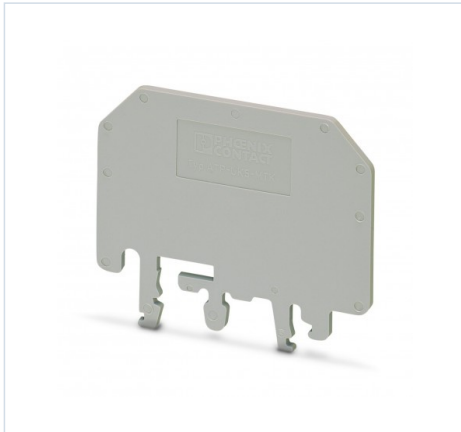

|                 |                                                 |
|-----------------|-------------------------------------------------|
| Manufacturer    | PHOENIX CONTACT                                 |
| MPN / Reference | ATP-UK 5-MTK                                    |
| Catalog number  | 3004210                                         |
| Category        | Endplate and partition plate for terminal block |
| Minimum order   | 50 Pcs                                          |
| Document ID     | EO-3C41C632C5                                   |
| Generated       | 2026-08-04                                      |

**Product Overview**

Partition plate

Spacer plate, length: 60 mm, width: 2 mm, height: 48.9 mm, colour: grey

Partition plate, depth: 48.9 mm, width: 2 mm, height: 60 mm, color: gray

**STRUCTURED PRODUCT DATA****Technical Specifications**

No structured technical attributes are currently available. Submit an RFQ for technical review.

**Classification & Catalog Path**

|              |                               |
|--------------|-------------------------------|
| Catalog path | PHOENIX CONTACT > Modular TBs |
|--------------|-------------------------------|

**Additional Product Information**

Technical dataProduct propertiesProduct type Partition plate

Data management status

Article revision 01

DimensionsWidth 2 mm

Height 60 mm

Depth 48.9 mm

Material specificationsColor gray (RAL 7042)

Material PA

Flammability rating according to UL 94 V2

Static insulating material application in cold -40 °C

Relative insulation material temperature index (Elec., UL 746 B) 125 °C

Environmental and real-life conditionsAmbient conditions

Ambient temperature (operation) -40 °C ... 105 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)

Ambient temperature (storage/transport) -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)

Ambient temperature (assembly) -5 °C ... 70 °C

Ambient temperature (actuation) -5 °C ... 70 °C

Permissible humidity (operation) 20 % ... 90 %

Permissible humidity (storage/transport) 30 % ... 70 %

ETIM for 3004210 Terminal blocks (EC000886)

Feature Name

Feature Value

End plate model (EF006586)

No

Partition model (EF006587)

Yes

Colour (EF000007)

Grey

Thickness (EF000125)

2.05 mm

Inflammability class of insulation material according to UL94 (EF002521)

V2

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / ATP-UK 5-MTK with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.