


## INDUSTRIAL COMPONENT DATA

# DFK-MSTB 2,5/ 6-GF 0710060 PHOENIX CONTACT

## Printed-circuit board connector

Brand: PHOENIX CONTACT | Manufacturer Part Number: DFK-MSTB 2,5/ 6-GF

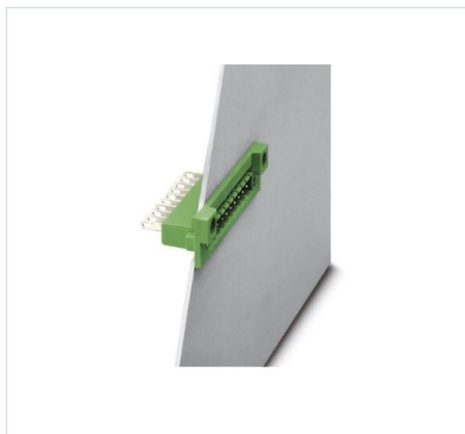

|                 |                                 |
|-----------------|---------------------------------|
| Manufacturer    | PHOENIX CONTACT                 |
| MPN / Reference | DFK-MSTB 2,5/ 6-GF              |
| Catalog number  | 0710060                         |
| Category        | Printed circuit board connector |
| Minimum order   | 1 Pcs                           |
| Document ID     | EO-5930B3E880                   |
| Generated       | 2026-08-01                      |

### Product Overview

DFK-MSTB 2,5/ 6-GF 0710060 PHOENIX CONTACT Printed-circuit board connector

## STRUCTURED PRODUCT DATA

### Technical Specifications

| TECHNICAL ATTRIBUTE          | VALUE            |
|------------------------------|------------------|
| Type of accessory/spare part | Charger          |
| Mains voltage                | 100 V - 240 V AC |
| Suitable for                 | CF-CRIMPHANDY    |
| Output voltage               | 12 V DC          |
| Charging current             | 2 A              |

### Classification & Catalog Path

|              |                                        |
|--------------|----------------------------------------|
| eCl@ss 7.1   | 21043711                               |
| eCl@ss 8.0   | 21043711                               |
| eCl@ss 9.0   | 21043711                               |
| ETIM 5.0     | EC002246                               |
| ETIM 6.0     | EC002246                               |
| ETIM 7.0     | EC002246                               |
| Catalog path | PHOENIX CONTACT > PCB Connectors (PCC) |

## Additional Product Information

Printed-circuit board connector

Wall pass-through housing, nominal section: 2.5 mm<sup>2</sup>, color: green, nominal current: 12 A, nominal voltage (III/2): 320 V, contact surface: Tin, contact type: Male, number of potentials: 6, number of rows: 1, number of poles: 6, number of connections: 6, family of articles: DFK-MSTB 2.5/.. -GF, pitch: 5 mm, connection type: Solder/flat plug connection, mounting: Direct mounting, pin arrangement: Linear pin arrangement, pin length [P]: 9.3 mm, number of solder pins per potential: 1, plug-in system: COMBICON MSTB 2.5, Plug-in face orientation: Standard, lock: Screw lock, fixing type: Air clamping (thread), Packaging Type: Boxed Packaging

### REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / DFK-MSTB 2,5/ 6-GF with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

#### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.