


INDUSTRIAL COMPONENT DATA

IPC 35 HC/ 4-STGF-SH-15,00 1784907 PHOENIX CONTACT

Printed-circuit board connector

Brand: PHOENIX CONTACT | Manufacturer Part Number: IPC 35 HC/ 4-STGF-SH-15,00

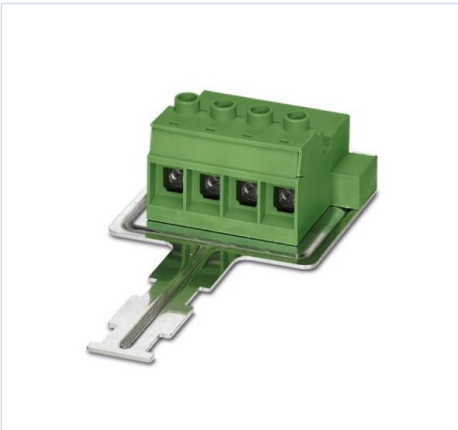

Manufacturer	PHOENIX CONTACT
MPN / Reference	IPC 35 HC/ 4-STGF-SH-15,00
Catalog number	1784907
Category	Cable connector
Minimum order	10 Pcs
Document ID	EO-9AC3080760
Generated	2026-08-03

Product Overview

Printed-circuit board connector

Connector for printed circuit board, nominal section: 35 mm², color: green, nominal current: 125 A, nominal voltage (III/2): 1000 V, contact surface: silver, contact type: Male, number of potentials: 4, number of rows: 1, number of poles: 4, number of connections: 4, family of articles: IPC 35 HC/.. -STGF-SH, pitch: 15 mm, connection type: Screw connection with traction capsule, screw clamping form: L Longitudinal groove, connection direction conductor/printed circuit board: 0 °, clamping hook: - without clamping hook, plug-in system: COMBICON PC 35, locking: Screw locking, fixing type: Air clamping (thread), packaging type: Boxed Packaging

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > PCB Connectors (PCC)
--------------	--

Additional Product Information

Key Commercial Data

Orderkey 1784907

Packing unit 10 pc

Minimum order quantity 10 pc

Note Made to Order (non-returnable)

Catalog page Page 589 (C-1-2013)

GTIN 4046356561211

Weight per Piece (excluding packing) 195.800 g

Custom tariff number 85366990

Country of origin PL (Poland)

Dimensions

Length [l] 155.8 mm

Width [w] 84.4 mm

Height [h] 42.5 mm

Pitch 15 mm

Dimension a 45 mm

General

Range of articles IPC 35 HC/..-STGF-SH

Number of positions 4

Connection method Screw connection with tension sleeve

Insulating material group I

Rated surge voltage (III/3) 8 kV

Rated surge voltage (III/2) 8 kV

Rated surge voltage (II/2) 8 kV

Rated voltage (III/3) 1000 V

Rated voltage (III/2) 1000 V

Rated voltage (II/2) 1000 V

Connection in acc. with standard EN-VDE

Nominal current IN 125 A

Nominal cross section 35 mm²

Maximum load current 125 A

Insulating material PA

Flammability rating according to UL 94 V0

Stripping length 20 mm

Screw thread M5

Tightening torque, min 2.5 Nm

Tightening torque max 4.5 Nm

Connection data

Conductor cross section solid min. 0.5 mm²

Conductor cross section solid max. 35 mm²

Conductor cross section flexible min. 0.5 mm²

Conductor cross section flexible max. 35 mm²

Conductor cross section flexible, with ferrule without plastic sleeve min. 1 mm²

Conductor cross section flexible, with ferrule without plastic sleeve max. 35 mm²

Conductor cross section flexible, with ferrule with plastic sleeve min. 1.5 mm²

Conductor cross section flexible, with ferrule with plastic....

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / IPC 35 HC/ 4-STGF-SH-15,00 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.