


INDUSTRIAL COMPONENT DATA

UPBV 4/ 1 BU 3045266 PHOENIX CONTACT Plug

Brand: PHOENIX CONTACT | Manufacturer Part Number: UPBV 4/ 1 BU

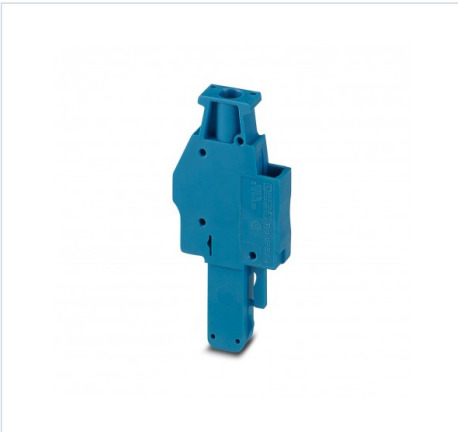

Manufacturer	PHOENIX CONTACT
MPN / Reference	UPBV 4/ 1 BU
Catalog number	3045266
Category	Terminal block connector
Minimum order	50 Pcs
Document ID	EO-0D263330F7
Generated	2026-08-02

Product Overview

Plug

Connector, rated voltage: 800 V, rated current: 32 A, number of poles: 1, connection type: Screw connection, Sizing cross-section: 4 mm², cross-section: 0.14 mm²- 6 mm², color: blue

Plug, nom. voltage: 800 V, nominal current: 32 A, number of positions: 1, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.14 mm²- 6 mm², color: blue

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Modular TBs
--------------	-------------------------------

Additional Product Information

Technical dataProduct propertiesProduct type Terminal plug

Number of positions 1

Pitch 6.2 mm

Potentials 1

Data management status

Article revision 08

Insulation characteristics

Overvoltage category III

Degree of pollution 3

Electrical propertiesRated surge voltage 8 kV

Connection dataNominal cross section 4 mm²

Screw thread M3

Tightening torque 0.6 ... 0.8 Nm
Stripping length 9 mm
Internal cylindrical gage A4
Connection in acc. with standard IEC 61984
Conductor cross section rigid 0.14 mm² ... 6 mm²
Cross section AWG 26 ... 10 (converted acc. to IEC)
Conductor cross section flexible 0.14 mm² ... 6 mm²
Conductor cross section, flexible [AWG] 26 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve) 0.14 mm² ... 4 mm²
Flexible conductor cross section (ferrule with plastic sleeve) 0.14 mm² ... 4 mm²
2 conductors with same cross section, solid 0.14 mm² ... 1.5 mm²
2 conductors with same cross section, flexible 0.14 mm² ... 1.5 mm²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve 0.14 mm² ... 1.5 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve 0.5 mm² ... 1 mm²
Nominal current 32 A
Maximum load current 32 A (with 6 mm² conductor cross section)
Nominal voltage 800 V
Nominal cross section 4 mm²
Dimensions Width 6.2 mm
Height 22 mm
Depth 48.5 mm
Length 22 mm
Pitch 6.2 mm
Material specifications Color blue (RAL 5015)
Flammability rating according to UL 94 V0
Insula...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / UPBV 4/ 1 BU with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.