


INDUSTRIAL COMPONENT DATA

RIF-4-BSC/3X21 2900960 PHOENIX CONTACT Relay base

Brand: PHOENIX CONTACT | Manufacturer Part Number: RIF-4-BSC/3X21

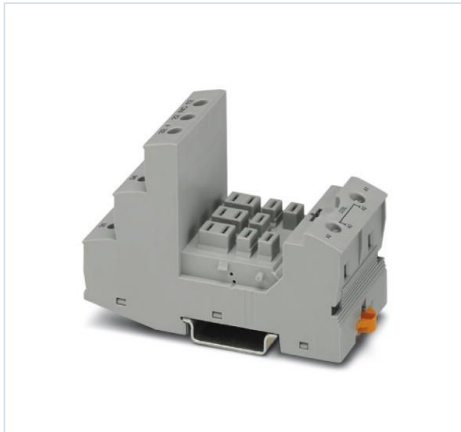

Manufacturer	PHOENIX CONTACT
MPN / Reference	RIF-4-BSC/3X21
Catalog number	2900960
Category	Relay socket
Minimum order	10 Pcs
Document ID	EO-1495AA5787
Generated	2026-08-05

Product Overview

Relay base

RIF-4 relay socket..., for high-power relays with 2 or 3 switched contacts or 3 normally open contacts, screw connection, socket for input/anti-parasitic modules possible, for rail mounting NS 35/7.5

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Relays
--------------	-------------------------------------

Additional Product Information

Key Commercial Data

Orderkey 2900960

Packing unit 10 pc

Catalog page Page 325 (C-5-2017)

GTIN 4046356733182

Weight per Piece (excluding packing) 89.500 g

Custom tariff number 85366990

Country of origin CN (China)

Dimensions

Width 44 mm

Height 96 mm

GRP depth with retaining bracket 91 mm

Ambient conditions

Ambient temperature (operation) -40 °C ... 85 °C (Depends on application/assembly)

Ambient temperature (storage/transport) -40 °C ... 85 °C

Input data

Protective circuit depending on the selected input/suppressor modules

Connection data, input side

Connection name Input side

Connection method Screw connection

Stripping length 8 mm

Conductor cross section solid 0.5 mm² ... 4 mm²

Conductor cross section flexible 0.5 mm² ... 4 mm²

0.5 mm² ... 4 mm² (Ferrule with plastic sleeve)

Conductor cross section flexible (2 conductors with same cross section) 0.5 mm² ... 2.5 mm²

0.5 mm² ... 1.5 mm² (TWIN ferrule with plastic sleeve)

Conductor cross section AWG 20 ... 10 (solid)

20 ... 12 (flexible)

Torque 0.5 Nm ... 0.6 Nm

Connection data, output side

Connection name Contact side

Connection method Screw connection

Stripping length 8 mm

Conductor cross section solid 0.5 mm² ... 4 mm²

Conductor cross section flexible 0.5 mm² ... 4 mm²

0.5 mm² ... 4 mm² (Ferrule with plastic sleeve)

Conductor cross section flexible (2 conductors with same cross section) 0.5 mm² ... 2.5 mm²

0.5 mm² ... 1.5 mm² (TWIN ferrule with plastic sleeve)

Conductor cross section AWG 20 ... 10 (solid)

20 ... 12 (flexibl...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / RIF-4-BSC/3X21 with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.