


**INDUSTRIAL COMPONENT DATA**

# SAC-3P-10,0-PVC/M 8FS BK 1508378 PHOENIX CONTACT

## Sensor/actuator cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-3P-10,0-PVC/M 8FS BK

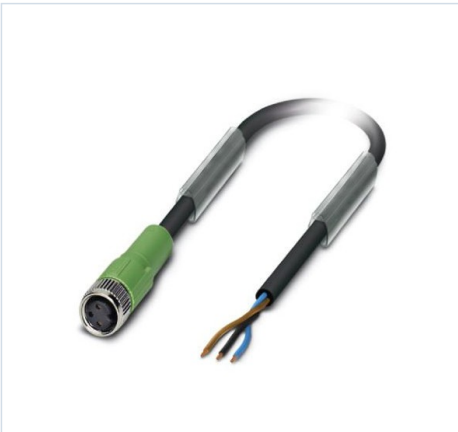

|                 |                            |
|-----------------|----------------------------|
| Manufacturer    | PHOENIX CONTACT            |
| MPN / Reference | SAC-3P-10,0-PVC/M 8FS BK   |
| Catalog number  | 1508378                    |
| Category        | Sensor-actuator patch cord |
| Minimum order   | 100 Pcs                    |
| Document ID     | EO-13EEB473FA              |
| Generated       | 2026-08-05                 |

### Product Overview

Sensor/actuator cable

Sensor/actuator cable, 3-pole, PVC, black RAL 9005, free cable end, to M8 straight connection female, cable length: 10 m

**STRUCTURED PRODUCT DATA**

### Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

### Classification & Catalog Path

|              |                                                       |
|--------------|-------------------------------------------------------|
| Catalog path | PHOENIX CONTACT > Industrial Field Connectivity (IFC) |
|--------------|-------------------------------------------------------|

### Additional Product Information

Key Commercial Data

Orderkey 1508378

Packing unit 1 pc

GTIN 4017918895334

Weight per Piece (excluding packing) 248.000 g

Custom tariff number 85444290

Country of origin DE (Germany)

Dimensions

Length of cable 10 m

Stripping length of the free conductor end 50 mm

Ambient conditions

Degree of protection IP65

IP67

IP68

**General**

Rated current at 40°C 4 A

Rated voltage 48 V AC

60 V DC

Number of positions 3

Insulation resistance  $\geq 100 \text{ M}\Omega$ 

Coding A - standard

Status display No

Overvoltage category II

Degree of pollution 3

**Material**

Flammability rating according to UL 94 HB

Contact material CuSn

Contact surface material Ni/Au

Contact carrier material TPU GF

Material of grip body TPU, hardly inflammable, self-extinguishing

Material, knurls Zinc die-cast, nickel-plated

Sealing material NBR

**Standards and Regulations**

Flammability rating according to UL 94 HB

**Cable**

Cable type PVC black

Cable type (abbreviation) PVC

Cable abbreviation LiYY

Conductor cross section  $3 \times 0.25 \text{ mm}^2$  (Signal line)

AWG signal line 24

Conductor structure signal line  $32 \times 0.10 \text{ mm}$ Core diameter including insulation  $1.25 \text{ mm} \pm 0.02 \text{ mm}$ Thickness, insulation  $\geq 0.23 \text{ mm}$  (Core insulation)

Wire colors brown, blue, black

Overall twist 3 wires, twisted

External sheath, color black RAL 9005

Outer sheath thickness  $\geq 0.76 \text{ mm}$ External cable diameter  $D 4.4 \text{ mm} \pm 0.15 \text{ mm}$ 

Cable weight 29 kg/km

Outer sheath, material PVC

Material conductor insulation PVC

Conductor material Bare Cu litz wires

Insulation resistance  $\geq 100 \text{ M}\Omega \cdot \text{km}$  (at 20 °C)

Conduc...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-3P-10,0-PVC/M 8FS BK with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.