


**INDUSTRIAL COMPONENT DATA**

# SAC-3P- 6,75-PUR/FR SCO 0,08 1421964 PHOENIX CONTACT

## Sensor/actuator cable SAC-3P- 6,75-PUR/FR SCO 0,08 1421..

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-3P- 6,75-PUR/FR SCO 0,08

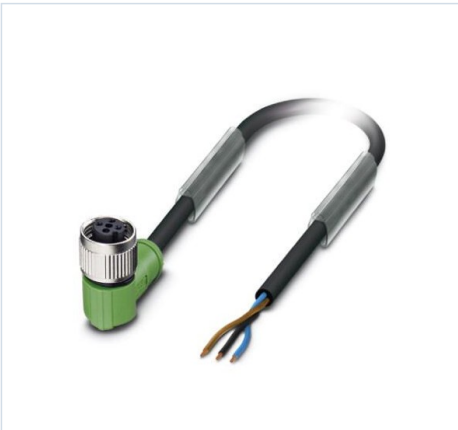

|                 |                              |
|-----------------|------------------------------|
| Manufacturer    | PHOENIX CONTACT              |
| MPN / Reference | SAC-3P- 6,75-PUR/FR SCO 0,08 |
| Catalog number  | 1421964                      |
| Category        | Sensor-actuator patch cord   |
| Minimum order   | 100 Pcs                      |
| Document ID     | EO-DAD14835F0                |
| Generated       | 2026-08-06                   |

### Product Overview

Sensor/actuator cable - SAC-3P- 6,75-PUR/FR SCO 0,08 - 1421964

Sensor/actuator cable, 3-pole, halogen-free PUR, greyish black RAL 7021, free cable end, to Angled connection female M12 SPEEDCON, coding: coded A, cable length: 6.8 m, free cable end 60 mm

**STRUCTURED PRODUCT DATA**

### Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

### Classification & Catalog Path

|              |                                                       |
|--------------|-------------------------------------------------------|
| Catalog path | PHOENIX CONTACT > Industrial Field Connectivity (IFC) |
|--------------|-------------------------------------------------------|

### Additional Product Information

Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Socket angled M12 SPEEDCON, A-coded, cable length: 6.8 m, free cable end 60 mm

Key Commercial Data

Orderkey 1421964

Packing unit 1

GTIN 4055626289281

Custom tariff number 85444290

Dimensions

Length of cable 6.8 m

Stripping length of the free conductor end 50 mm

Ambient conditions

Ambient temperature (operation) -25 °C ... 90 °C (Plug / socket)

Degree of protection IP65

IP67

General

Rated current at 40°C 4 A

Rated voltage 250 V AC

250 V DC

Number of positions 3

Insulation resistance  $\geq 100 \text{ M}\Omega$ 

Coding A - standard

Status display No

Protective circuit/component unwired

Overvoltage category II

Degree of pollution 3

Insertion/withdrawal cycles  $\geq 100$ 

Torque 0.4 Nm

Material

Flammability rating according to UL 94 HB

Contact material CuSn

Contact surface material Ni/Au

Contact carrier material TPU GF

Material of grip body TPU, hardly inflammable, self-extinguishing

Material, knurls Zinc die-cast, nickel-plated

Sealing material NBR

Standards and Regulations

Flammability rating according to UL 94 HB

Cable

Cable type PUR halogen-free black

Cable type (abbreviation) PUR

Cable abbreviation Li9Y11Y

UL AWM style 20549

Conductor cross section  $3 \times 0.34 \text{ mm}^2$  (Signal line)

AWG signal line 22

Conductor structure signal line  $42 \times 0.10 \text{ mm}$ Core diameter including insulation  $1.27 \text{ mm} \pm 0.02 \text{ mm}$  (Signal line)Thickness, insulation  $\geq 0.21 \text{ mm}$  (Core insulation)

Wire colors brown, blue, black

Overall twist 3 wires, twist...

## REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-3P- 6,75-PUR/FR SCO 0,08 with the required quantity to [info@electricaonline.com](mailto:info@electricaonline.com) or use [electricaonline.com/request-quote](https://electricaonline.com/request-quote).

### GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.