


INDUSTRIAL COMPONENT DATA

SAC-4P-10-PVC/M12FR SH OBS VA 1403413 PHOENIX CONTACT Sensor/actuator cable SAC-4P-10-PVC/M12FR SH OBS VA 14..

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-4P-10-PVC/M12FR SH OBS VA

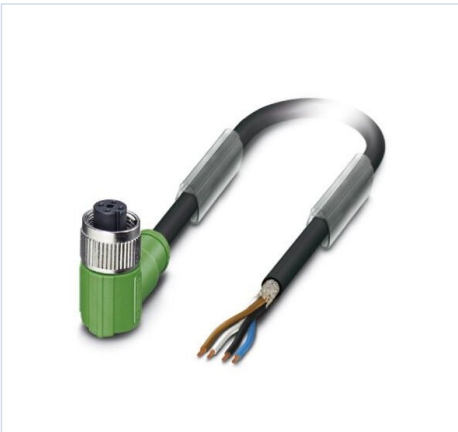

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-4P-10-PVC/M12FR SH OBS VA
Catalog number	1403413
Category	Sensor-actuator patch cord
Minimum order	50 Pcs
Document ID	EO-CE8CAE2DB2
Generated	2026-08-06

Product Overview

Sensor/actuator cable - SAC-4P-10-PVC/M12FR SH OBS VA - 1403413

Sensor/actuator cable, 4-pole, PVC, black RAL 9005, shielded, free cable end, to Elbowed female M12, coding: A, cable length: 10 m, Customer variant

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Sensor/actuator cable, 4-position, PVC, black RAL 9005, shielded, cable length: 10 m, Customer version

Key Commercial Data

Orderkey 1403413

Packing unit 1

GTIN 4046356651646

Custom tariff number 85444290

Dimensions

Length of cable 10 m

Stripping length of the free conductor end 50 mm

General

Rated current at 40°C 4 A

Rated voltage 48 V AC
60 V DC
Number of positions 4
Coding A - standard
Standards/regulations M12 connector IEC 61076-2-101
Status display No
Protective circuit/component unwired
Overvoltage category II
Degree of pollution 3
Material
Flammability rating according to UL 94 HB
Contact material CuSn
Contact surface material Ni/Au
Contact carrier material TPU GF
Material of grip body TPU, hardly inflammable, self-extinguishing
Material, knurls Stainless steel
Sealing material NBR
Standards and Regulations
Standard designation M12 connector
Standards/regulations IEC 61076-2-101
Flammability rating according to UL 94 HB
Cable
Cable type PVC black
Cable type (abbreviation) PVC
Conductor cross section 4x 0.34 mm² (Signal line)
AWG signal line 22
Conductor structure signal line 42x 0.10 mm
Core diameter including insulation 1.4 mm ±0.02 mm
Thickness, insulation ≥ 0.23 mm (Core insulation)
≥ 0.76 mm (Outer cable sheath)
Wire colors brown, white, blue, black
Overall twist 4 wires, twisted
Shielding Tinned copper braided shield
Optical shield covering 85 %
External sheath, color black RAL 9005
External cable diameter D 5.9 mm ±0.2 mm
Cable weight 52 kg/km
Outer sheath, mate...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-4P-10-PVC/M12FR SH OBS VA with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.