


INDUSTRIAL COMPONENT DATA

SAC-5P- 2,0-PVC/M12FR P 1424951 PHOENIX CONTACT

Sensor/actuator cable SAC-5P- 2,0-PVC/M12FR P 1424951

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-5P-2,0-PVC/M12FR P

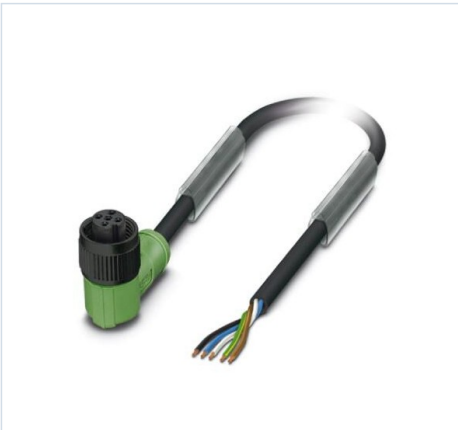

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-5P-2,0-PVC/M12FR P
Catalog number	1424951
Category	Sensor-actuator patch cord
Minimum order	100 Pcs
Document ID	EO-8FA4D05E61
Generated	2026-08-05

Product Overview

Sensor/actuator cable - SAC-5P- 2,0-PVC/M12FR P - 1424951

Sensor/actuator cable, 5-pole, PVC, black RAL 9005, free cable end, to Elbow connection female M12, coding: A, cable length: 2 m, with plastic knurling

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Sensor/actuator cable, 5-position, PVC, black RAL 9005, free cable end, on Socket angled M12, A-coded, cable length: 2 m, with plastic knurl

Key Commercial Data

Orderkey 1424951

Packing unit 1

GTIN 4055626382999

Custom tariff number 85444290

Dimensions

Length of cable 2 m

Ambient conditions

Ambient temperature (operation) -25 °C ... 90 °C (Plug / socket)

General

Rated current at 40°C 4 A

Rated voltage 48 V AC
60 V DC
Number of positions 5
Insulation resistance $\geq 100 \text{ M}\Omega$
Coding A - standard
Standards/regulations M12 connector IEC 61076-2-101
Status display No
Protective circuit/component unwired
Overvoltage category II
Degree of pollution 3
Insertion/withdrawal cycles ≥ 100
Material
Flammability rating according to UL 94 HB
Contact material CuSn
Contact surface material Ni/Au
Contact carrier material TPU GF
Material of grip body TPU, hardly inflammable, self-extinguishing
Material, knurls Polyamide
Sealing material NBR
Standards and Regulations
Standard designation M12 connector
Standards/regulations IEC 61076-2-101
Flammability rating according to UL 94 HB
Cable
Cable type PVC black
Cable type (abbreviation) PVC
Cable abbreviation LiYY
UL AWM style 2464 / 1729 (80°C/300 V)
Conductor cross section $5 \times 0.34 \text{ mm}^2$ (Signal line)
AWG signal line 22
Conductor structure signal line $19 \times 0.15 \text{ mm}$
Core diameter including insulation $1.26 \text{ mm} \pm 0.05 \text{ mm}$
Thickness, insulation $\geq 0.23 \text{ mm}$ (Core insulation)
Wire colors brown, white, blue, black, green-yellow
Overall twist 5 wires around filler to th...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-5P-2,0-PVC/M12FR P with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.