


INDUSTRIAL COMPONENT DATA

SAC-8P-M12MS/ 0,5-542/M12FSSH 1406068 PHOENIX CONTACT Sensor/actuator cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-8P-M12MS/ 0,5-542/M12FSSH

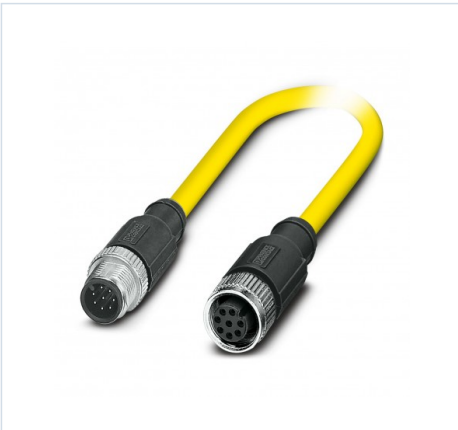

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-8P-M12MS/ 0,5-542/M12FSSH
Catalog number	1406068
Category	Sensor-actuator patch cord
Minimum order	50 Pcs
Document ID	EO-F2F2C3B698
Generated	2026-08-06

Product Overview

Sensor/actuator cable

Sensor/Actuator Cable, 8-pole, PVC, yellow, shielded, M12 straight male connector, coding: A, to M12 straight connection female, coding: A, cable length: 0.5 m

Sensor/Actuator Cable, 8-pole, PVC, yellow, shielded, M12 Straight Male Connector, Coding: A, on M12 Straight Female Connector, Coding: A, Cable Length: 0.5 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path	PHOENIX CONTACT > Industrial Field Connectivity (IFC)
--------------	---

Additional Product Information

Key Commercial Data

Orderkey 1406068

Packing unit 1 pc

Minimum order quantity 50 pc

Note Made to Order (non-returnable)

GTIN 4046356799799

Weight per Piece (excluding packing) 58.800 g

Custom tariff number 85444290

Country of origin US (United States)

Dimensions

Length of cable 0.5 m

Ambient conditions

Ambient temperature (operation) -25 °C ... 90 °C (Plug / socket)

Degree of protection IP65

IP67

General

Rated current at 40°C 2 A

Rated voltage 30 V AC

30 V DC

Number of positions 8

Color handle area black

Insulation resistance $\geq 100 \text{ M}\Omega$

Coding A - standard

Standards/regulations M12 connector IEC 61076-2-101

Status display No

Protective circuit/component unwired

Overvoltage category II

Degree of pollution 3

Insertion/withdrawal cycles ≥ 100

Torque 0.4 Nm (M12 connector)

Material

Flammability rating according to UL 94 HB

Contact material CuZn

Contact surface material Ni/Au

Contact carrier material TPU GF

Material of grip body TPU, hardly inflammable, self-extinguishing

Material, knurls Zinc die-cast, nickel-plated

Sealing material NBR

Standards and Regulations

Standard designation M12 connector

Standards/regulations IEC 61076-2-101

Flammability rating according to UL 94 HB

Cable

Cable type PVC yellow 105 °C

Cable type (abbreviation) 542

UL AWM style 2517 (105 °C / 300 V)

AWG signal line 24

Conductor structure signal line 32x 1.10 mm

Core diameter including insulation 1.12 mm $\pm 0.03 \text{ mm}$

Wire colors white, brown, green, yellow, gray, pink, blue, red

Overall twist 8 wires around fill...

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-8P-M12MS/ 0,5-542/M12FSSH with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.