


INDUSTRIAL COMPONENT DATA

SAC-HZ-3P-10,0-542/ FS SCO BK 1409532 PHOENIX CONTACT Sensor/actuator cable

Brand: PHOENIX CONTACT | Manufacturer Part Number: SAC-HZ-3P-10,0-542/ FS SCO BK

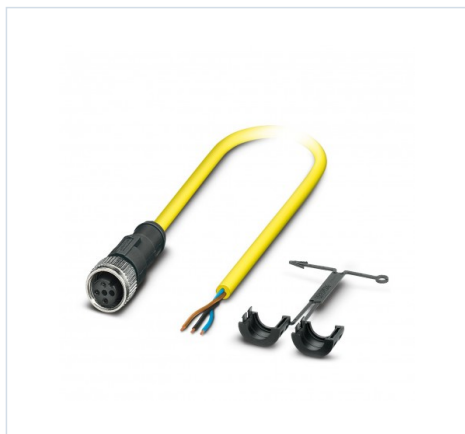

Manufacturer	PHOENIX CONTACT
MPN / Reference	SAC-HZ-3P-10,0-542/ FS SCO BK
Catalog number	1409532
Category	Sensor-actuator patch cord
Minimum order	10 Pcs
Document ID	EO-49A0234E36
Generated	2026-08-06

Product Overview

Sensor/actuator cable

Sensor/Actuator Cable, 3-Pole, PVC, Yellow, Free Cable End, to Straight Connecting Female M12 SPEEDCON, Coding: A, Cable Length: 10 m

Sensor/actuator cable, 3-pin, PVC, yellow, free conductor end, on SPEEDCON M12 straight socket, coding: A, cable length: 10 m

STRUCTURED PRODUCT DATA

Technical Specifications

No structured technical attributes are currently available. Submit an RFQ for technical review.

Classification & Catalog Path

Catalog path PHOENIX CONTACT > Industrial Field Connectivity (IFC)

Additional Product Information

Key Commercial Data

Orderkey 1409532

Packing unit 1 pc

Minimum order quantity 10 pc

Note Made to Order (non-returnable)

GTIN 4055626017877

Weight per Piece (excluding packing) 22.220 g

Custom tariff number 85444290

Country of origin US (United States)

Dimensions

Length of cable 10 m

Ambient conditions

Ambient temperature (operation) -25 °C ... 90 °C (Plug / socket)

Degree of protection IP65

IP67

IP68

General

Note These cable assemblies are UL/cUL listed for use in Class I, Division 2 (CID2) hazardous locations.

Rated current at 40°C 4 A

Rated voltage 250 V AC

250 V DC

Number of positions 3

Insulation resistance $\geq 100 \text{ M}\Omega$

Coding A - standard

Standards/regulations M12 connector IEC 61076-2-101

Status display No

Protective circuit/component unwired

Overvoltage category II

Degree of pollution 3

Torque 0.4 Nm (M12 connector)

Material

Flammability rating according to UL 94 HB

Contact material CuSn

Contact surface material Ni/Au

Contact carrier material TPU GF

Material of grip body TPU, hardly inflammable, self-extinguishing

Material, knurls Zinc die-cast, nickel-plated

Sealing material NBR

Standards and Regulations

Standard designation M12 connector

Standards/regulations IEC 61076-2-101

Flammability rating according to UL 94 HB

UL, USA/Canada Class I, Div. 2, Groups A, B, C, D

Cable

Cable type PVC yellow 105 °C

Cable type (abbreviation) 542

UL AWM style 2517 (105 °C / 300 V)

AWG signal line 22

Conductor structure signal line 30x 1.30 mm

Core diameter including insulation 1.27 mm ± 0.05 mm

REQUEST PRICE, AVAILABILITY & TECHNICAL REVIEW

Send PHOENIX CONTACT / SAC-HZ-3P-10,0-542/ FS SCO BK with the required quantity to info@electricaonline.com or use electricaonline.com/request-quote.

GLOBAL OFFICES

Germany: Lise-Meitner-Straße 13, 89081 Ulm | USA: 16225 Park Ten Pl #500, Houston, TX 77084 | UAE: HDS Business Centre Tower, Cluster M, 33rd Floor, JLT, Dubai

Catalog-generated document. Product names, marks and specifications belong to their respective owners. Verify safety-critical, compatibility and certification requirements against the manufacturer documentation before purchase or installation.